
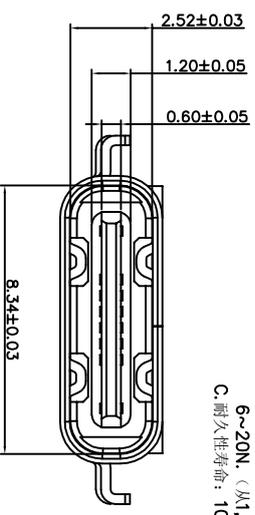

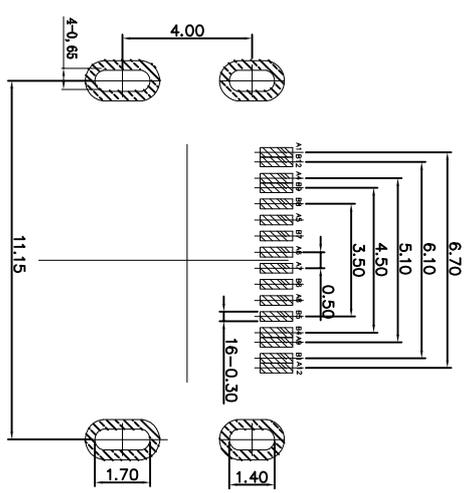
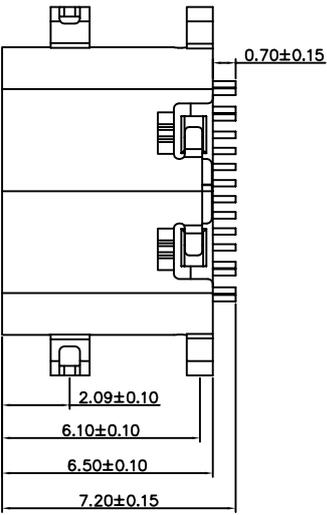
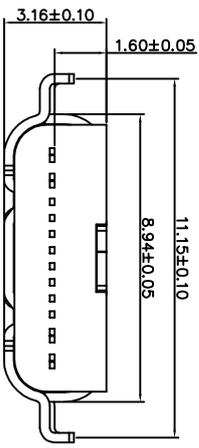


ROHS

客户图

目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

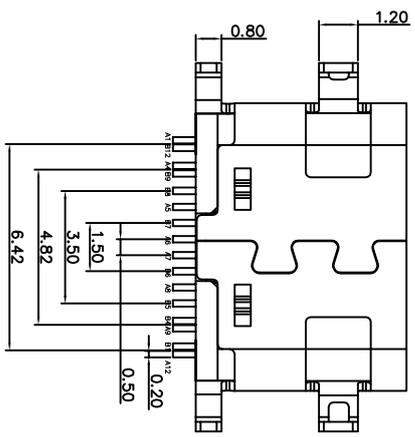

- 1.材料
A.主体: LCP, 黑色, 白色, UL 94-V0;
B.端子: C2680, 电镀铜金;
C.外壳: 不锈钢, 镀金镍;
- 2.主要特性
A.电压等级: 20V AC;
B.电流: 2A;
C.工作温度: -40c~85c;
- 3.电气要求:
A.接触电阻: $50m\ \Omega$ Max. (初始), $50m\ \Omega$ Max. (最后);
B.电压: 100V AC 1分钟;
C.绝缘电阻: 100M Ω min. DC 500V;
- 4.机械性能:
A.插入力: 5~20N. (从1~10,000次);
B.拔出力: 8~20N. (从1~1,000次);
C.耐久寿命: (从1,001~10,000次):
6~20N. (从1,001~10,000次);
C.耐久寿命: 10,000次;

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	00312-UCAF006-X
X	±0.30	X'	±5'	审核 CHECK	雷永健	产品名称 PRODUCT NO.	TYPE C 16P母座沉板1.6
.XX	±0.25	.X'	±2'	核准 APPROVE	雷永健	角法 VIEW	版本 VER
.XXX	±0.15	.XXX'	±0.5'	日期 DATE	2009/10/20		A0