

RoHS 客户图

NOTES:
1.HOUSING: SEE NOTES, UL94V-0.
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:

1.ELECTRICAL CHARACTERISTIC:

CONTACT RESISTANCE: 30MΩ MAX

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN

INSULATION RESISTANCE: 1000MΩ MIN

2.MECHANICAL CHARACTERISTIC:

INSERTION FORCE: 35N(3.57KGf) MAX

EXTRACTION FORCE: 10~35N(1.02~3.57KGf)MIN

DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N

5000 CYCLES MIN





5000 CYCLES EXTRACTION

FORCE: 3~35N







3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

材质：硅胶

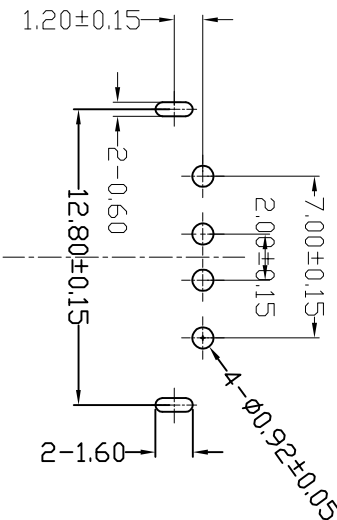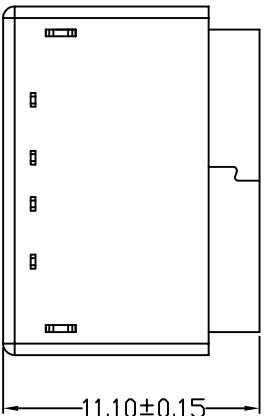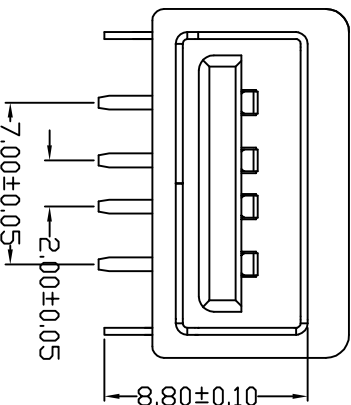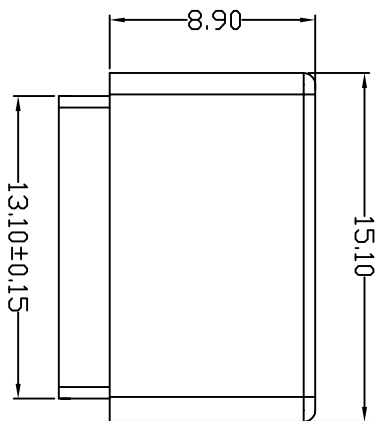

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

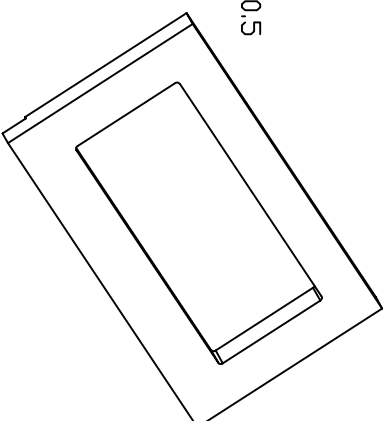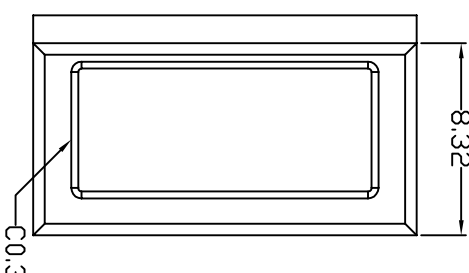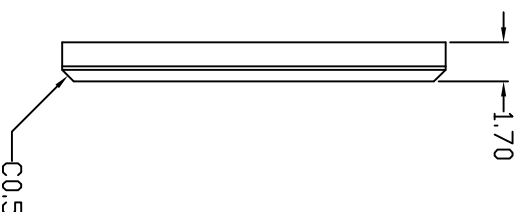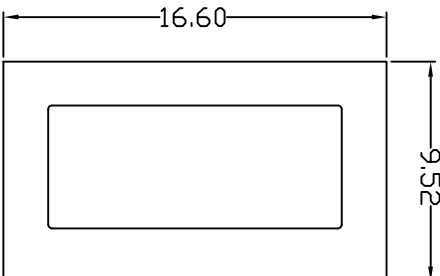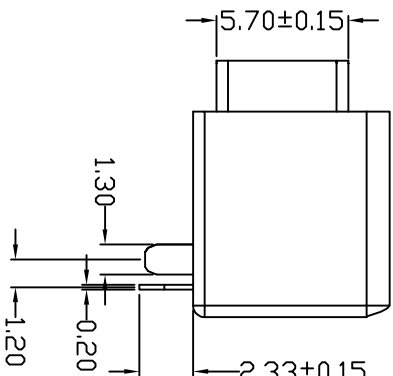

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表				单位	MM	制图	王冠	产品料号	01004-10DFFX5-B
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.	
X	±0.30	X'	±5°	比例	1:1	审核	雷永健	产品名称	10.0 USB AF 90度盲插无边 18-6.2 反向 防水型
.X	±0.25	.X'	±2°	SCALE		CHD		PRODUCT NO.	
.XX	±0.30	.XX'	±1°	DATE	2009/10/20	批准	雷永健	角法	
.XXX	±0.15	.XXX'	±0.5°	APPD				版本	A0