
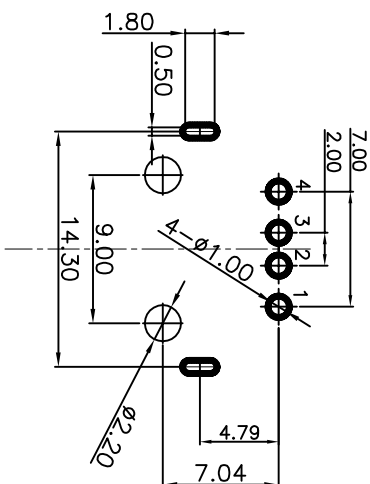





1 2 3 4 5 6 7 8 9 10

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20





- NOTES:
- SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE :10N~30N
 - UNMATING FORCE: 8N~30N
 - DURABILITY:1500 CYCLES

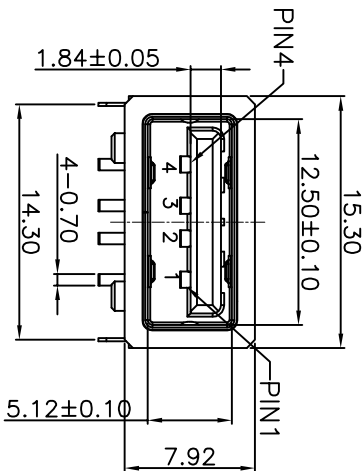

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm

DEFAULT TOLERANCE+/-0.05

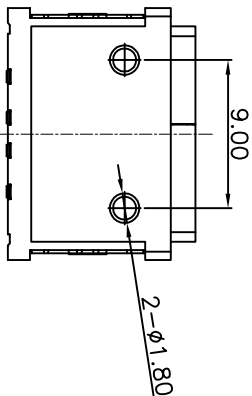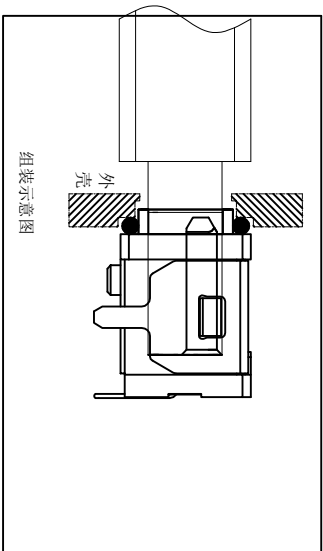


PIN ASSIGNMENT

PIN NO.	1	2	3	4
SIGNAL NAME	VBUS	D-	D+	GND

产品图

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表				单位	制图	审核	日期
TOLERANCE UNLESS OTHERWISE				UNITS	DRAWING	CHCK	DATE
X	±0.30	X'	±5°	MM	王冠	雷永健	2009/10/20
X	±0.25	X'	±2°	SCALE	雷永健	雷永健	2009/10/20
.XX	±0.20	.XX'	±1°		审核	雷永健	
.XXX	±0.15	.XXX'	±0.5°		批准	雷永健	



注: 防水圈是圆形截面, 直径为1.0mm的
硅胶圈, 防水圈挤压力, 由1.0mm挤压到
0.4mm ~ 0.5mm, 防水效果好

ITEM	PART NAME	Q'TY	FINISH	NOTE
5	Outer Shell	1	SUS 301 1/4H	
4	Inner Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA10T (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	