






RoHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------


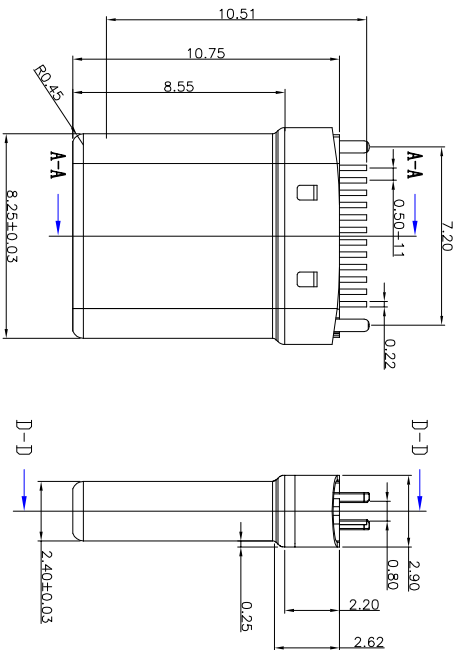


- NOTES:
- 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY, C5191 T=0.15±0.02mm
GOLD PLATED 1u" Min ON CONTACT AREA, 100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H₁T=0.20±0.02mm
50u" NICKEL PLATING OVER ALL.
Card hook: SUS301-H₁T=0.35±0.02mm
shrapnel: SUS304-H₁T=0.10±0.02mm
 - 2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 5000 CYCLES
 - 3.ELECTRICAL:
CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
4.ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C

截面 A-A

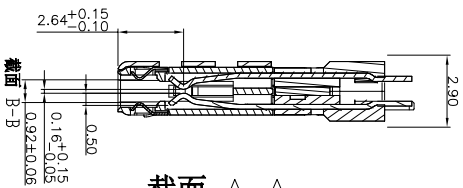

截面 D-D

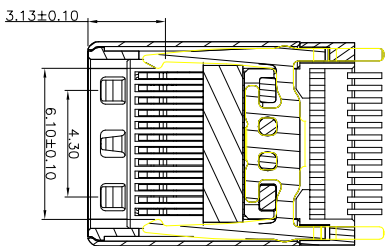

深圳市鑫风雷电子有限公司

产品图 PRODUCT CHART DWG		公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	00302-UCAM002-X
X	±0.30	X'	±5'	比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	TYPE C公头拉伸不带板
XX	±0.25	X''	±2'	日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER
XXX	±0.15	XXX'	±0.5'						A0