
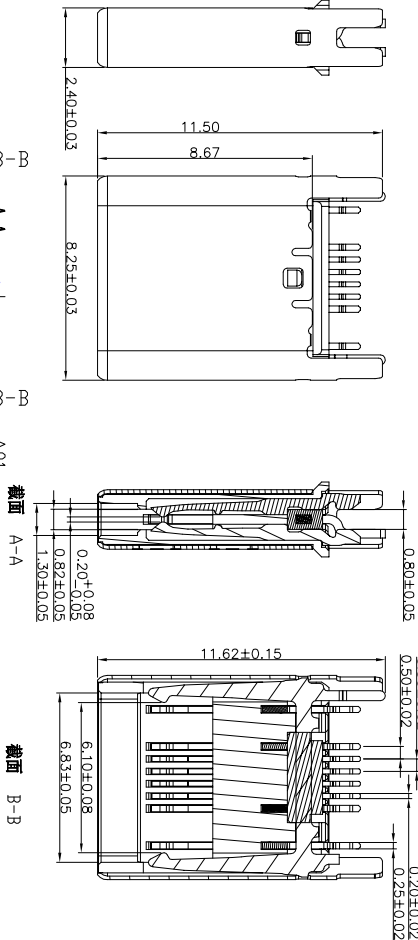


RoHS 客户图



目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



- NOTES:
- 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT:COOPER ALLOY, C5191 T=0.15±0.02mm
GOLD PLATED 1u” Min ON CONTACT AREA,100u”
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H,T=0.15±0.02mm
50u” NICKEL PLATING OVER ALL.
Card hook:SUS301-H,T=0.35±0.02mm
shrapnel:SUS304-H,T=0.10±0.02mm
- 2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 10000 CYCLES
- 3.ELECTRICAL:
CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
- 4.ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C

TABLE : PIN DEFINE

A12	A9	A8	A7	A6	A5	A4	A1	
GND		VBUS	SBU1	D-	D+	CC1	VBUS	GND
GND		VBUS	CC2	D+	D-	SBU2	VBUS	GND
B1	B4	B5	B6	B7	B8	B9	B12	



产 品 图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司				
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	王 冠	产 品 料 号 PRODUCT PART NO.	
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHD	雷永健	产 品 名 称 PRODUCT NO.
.XX	±0.30	.XX'	±1°	日期 DATE	2009/10/20	核准 APPD	雷永健	角 法 VIEW
.XXX	±0.15	.XXX'	±0.5°					 版本 VER
								A0

深圳市鑫风雷电子有限公司