
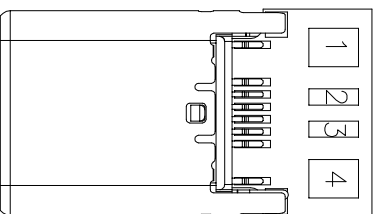

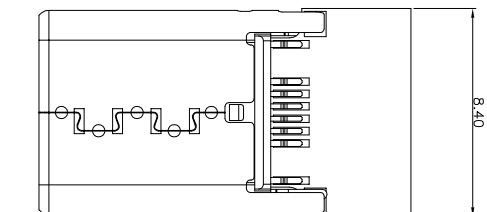
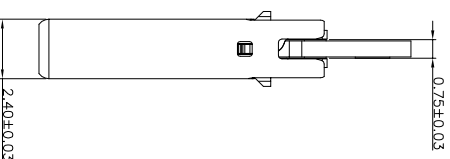
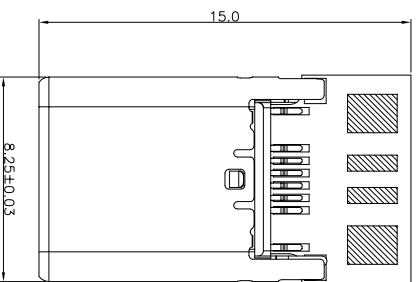



RoHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------



- NOTES:
- MATERIAL:
 - MOLDING: LCP UL94 V-0
 - CONTACT: COPPER ALLOY, C5191 T=0.15±0.02mm
 - GOLD PLATED 1u" Min ON CONTACT AREA, 100u" Min TIN (LEAD FREE) ON SOLDER AREA,
 - SHELL: SUS304-H,T=0.15±0.02mm
 - 50u" NICKEL PLATING OVER ALL.
 - Card hook: SUS301-H,T=0.35±0.02mm
 - shrapnel: SUS304-H,T=0.10±0.02mm
 - MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N.
 - DURABILITY: 10000 CYCLES
 - ELECTRICAL:
 - CURRENT: 5A MIN FOR VBUS;
 - 0.25A MIN FOR OTHER.
 - VOLTAGE: 5VAC MAX
 - WITHSTANDING VOLTAGE: 100V AC.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL
 - TEMPERATURE RANGE -55°C ~ +85°C

TABLE : PIN DEFINE

A12	A9	A8	A7	A6	A5	A4	A1
GND	VBUS	SBU1	D-	D+	CC1	VBUS	GND
GND	VBUS	CC2	D+	D-	SBU2	VBUS	GND
B1	B4	B5	B6	B7	B8	B9	B12

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	00302-UCAM004-X
X	±0.30	X'	±5'	审核 CHECK	雷永健	产品名称 PRODUCT NO.	TYPE C 16P公头插合式插针式SC-2
.XX	±0.25	.X'	±2'	日期 DATE	2009/10/20	角法 VIEW	⊕ ⊖
.XXX	±0.30	.XX'	±1'	核准 APPRO	雷永健	版本 VER	A0
	±0.15	.XXX'	±0.5'				