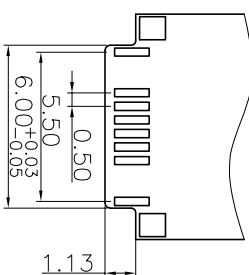



目録 MAPX	設定内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20


$$\begin{array}{r} 0.80 \\ + 0.02 \\ \hline \end{array}$$

1. Material: SEE TABLE 1;

2. Plating specification,

2-1.Contact:

Contact area: Ni50u"Min/Au See Table3;

Solder area: Ni50u"Min/Sn100u"Min.

Other area: Ni 50u"Min.

2-2.Shell:Nl.

2-3. Latch: "M: /C-100."M:

Solder dried: Ni50Cu Min/

3. Mechanical Performance ,

3-1.Insertion Force:5~20N;

3-2.Extraction Force:6~20N after 10000 cycles;

3-3.Durability:10000 cycles

4. Electrical Performance.

4-1. Insulation Resistance: 1000 Ω Min.


4-2.Contact Resistance :50mΩ Max.

4-3.Dielectric Strength :100V AC

5.characteristic impedance:100 Ohm $\pm$ 10%;

” is the important control dimensions.


7. The product accords with HF STD.

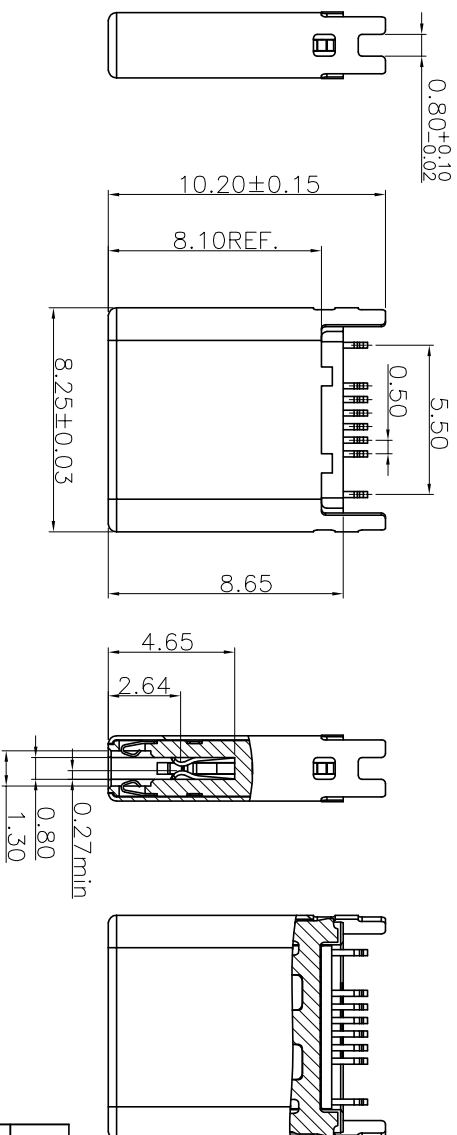

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

PINS DESCRIPTION, ONLY USED FOR 3.1 SERIES.

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	VBUS	SBU1	D-	D+	CC	VBUS	TX1-	TX1+	GND
GND	TX2+	TX2-	VBUS	Vconn			SBU2	VBUS	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

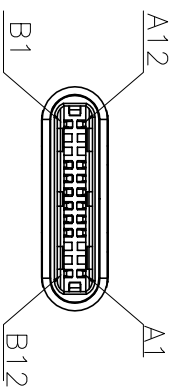

产品图

产品图 PRODUCT CHART DMC		深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表		单位	制图	王冠	产品料号
TOLERANCE UNLESS OTHERWISE		UNITS	DRAWING	Wangguang	PRODUCT NAME NO.
X.	±0.30	X.	±5°	雷永健	产品名称
.X	±0.25	.X	±2°	Lei Yongjian	PRODUCT NO.
.XX	±0.20	.XX	±1°	雷永健	联系方式
.XXX	±0.15	.XXX	±0.5°	Lei Yongjian	Mailbox: sale1@xfl.com.cn
		日期	核准	APPD	www.xfl.com.cn
		DATE	2009/10/20		