









1 2 3 4 5 6 7 8 9 10

RoHS 客户图



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

PIN ASSIGNMENTS					
A5	CC1	B12	GND		
A9	VBUS	B9	VBUS		
A12	GND	B5	CC2		
PIN	SIGNAL NAME	PIN	SIGNAL NAME	1	1-6, 5
				L	L-6, 8



产品图

PRODUCT CHART DWG

公差一览表

公差一览表				单位				比例				日期				制图				产品料号				产品名称				角法				版本			
TOLERANCE UNLESS OTHERWISE				UNITS				SCALE				DATE				DRAWING				PRODUCT PART NO.				TYPE C 6P 板上型母座后两脚SMT				VIEW				VER			
X	±0.30	X'	±5°	X	±0.25	X'	±2°	XX	±0.30	XX'	±1°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°
XXX				XXX				XXX				XXX				XXX				XXX				XXX				XXX				XXX			

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronic Co., Ltd

目錄

MAPX

變更內容

MODIFICATION

日期

DATE

A0

NEW





09-10-20

NOTE:

1. MATERIAL SPECIFICATION:
1. HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
 2. CONTACTS: COPPER ALLOY
 3. MID PLATE: STAINLESS STEEL
 4. FRONT SHELL: STAINLESS STEEL
2. PLATING SPECIFICATION:
2-1. CONTACTS:
NI 50μ" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
SEE TABLE1.
 - 2-2. FRONT SHELL:
SEE TABLE1.
 - 2-3. SHIELD PLATE:
CLEAR ONLY
3. MECHANICAL PERFORMANCE:
3-1. INSERTION FORCE: 0.5~2.0kgf.
 - 3-2. REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3. DURABILITY: 5000 CYCLES.
4. ELECTRICAL PERFORMANCE:
4-1. CURRENT RATING: 3.0A
VOLTAGE RATING: 5.0V
 - 4-2. ILCK:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ MAX.
ILCK MAX. CHANGE OF ALL PINS: 10mΩ.
 - 4-3. INSULATION RESISTANCE: 100MΩ MIN
 - 4-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25° C~+85° C.
 6. IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260° C.

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

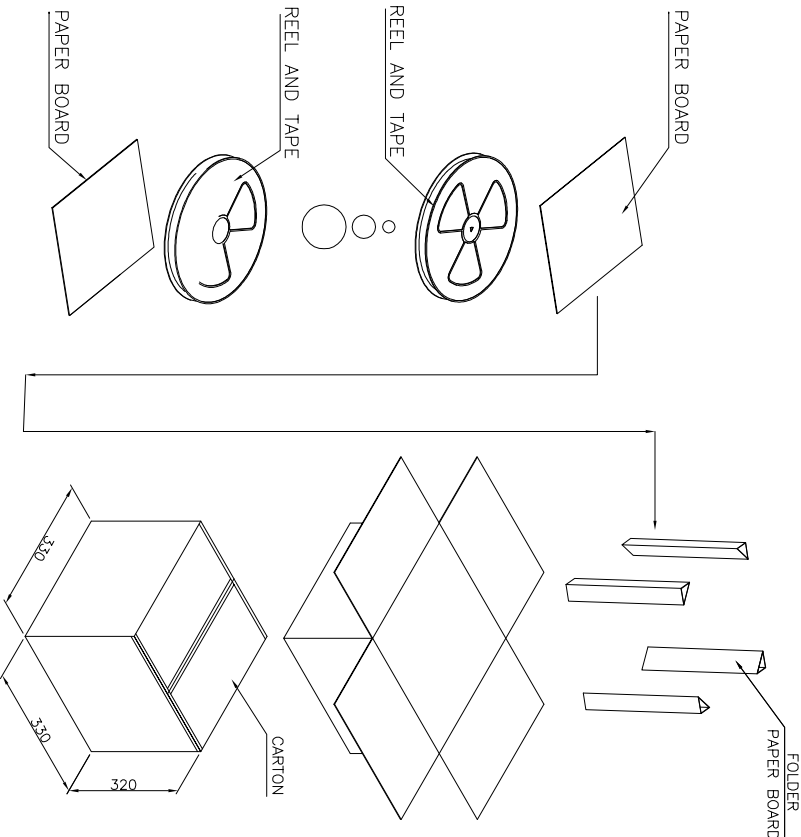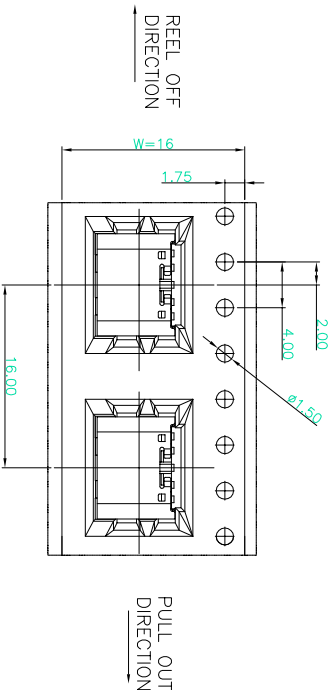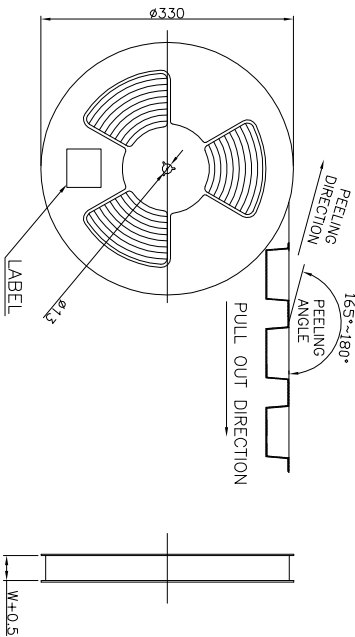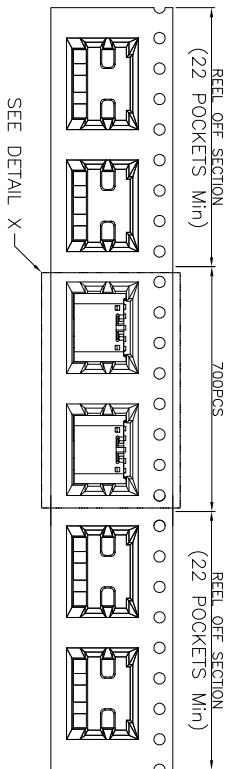

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE			单位 UNITS			制图 DRAWING			产品料号 PRODUCT PART NO.		
X	±0.30	X'	±5°	比例 SCALE	I:1	审核 CHKD	王冠	雷永健	产品名称 PRODUCT NO.	00723-UCAF011-X	TYPE C 6P 板上型母座后两脚SMT
.X	±0.25	.X'	±2°	日期 DATE	2009/10/20	核准 APPD	雷永健	雷永健	角法 VIEW	⊕	版本 VER
.XX	±0.30	.XX'	±1°								A0
.XXX	±0.15	.XXX'	±0.5°								

CONNECTOR (PCS)	REEL	CARTON
	1000	10000