

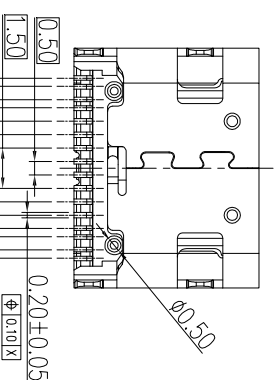
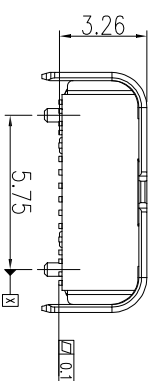

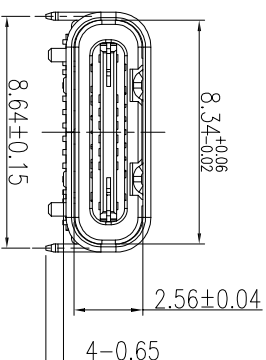



7	8	9	10
MAPX	MODIFICATION		DATE
AO	NEW		09-10-20



PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	D+1	B7	D-
A7	D-	B6	D+
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

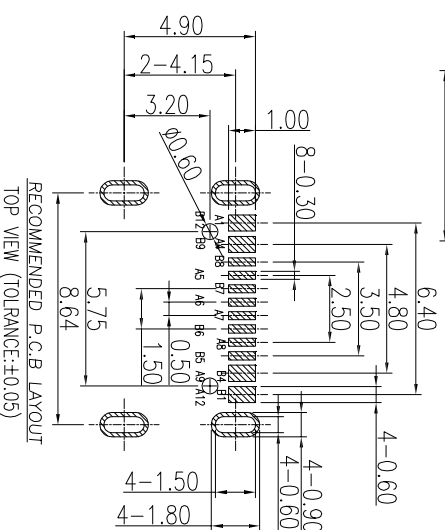
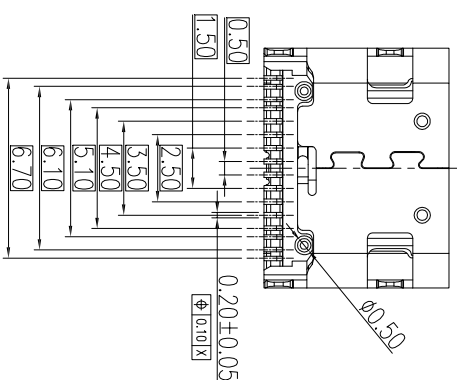


TABLE 1

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑤	MD PLATE	1	STAINLESS STEEL	4 _W : PLATING.	T=0.15mm
④	SHELL	1	STAINLESS STEEL	4 _W : PLATING.	T=0.30mm
③	TERMINAL-B	1	TABLE 2:	TABLE 2:	T=0.12mm
②	TERMINAL-A	1			T=0.12mm
①	INSULATOR	1	HIGH TEMP	Block	

产品图

深圳市鑫风雷电子有限公司

产品图		深圳市鑫风雷电子有限公司							
PRODUCT CHART DMC									
公差一览表									
TOLERANCE UNLESS OTHERWISE									
X.	±0.30	X.	±5°	单位	MM	制图	王冠	产品料号	01003-UCAF006-X
.X	±0.25	X.	±2°	比例	1:1	审核	雷永健	产品名称	TYPE C 16P母座板上型=L=6, 90
.XX	±0.30	.XX	±1°	日期	2009/10/20	核准	雷永健	角法	
.XXX	±0.15	.XXX	±0.5°	DATE		APPRO		VIEW	

NOTES

1. MATERIAL: SEE "TABLE 1"
2. FINISH: SEE "TABLE 1";

3. ELECTRICAL:

- 3.1. CURRENT RATING: 3A;
3.2. INSULATION RESISTANCE :100 MΩ MIN. AT 250VDC;
3.3. DIELECTRIC WITHSTANDING VOLTAGE:100VAC MIN;
3.4. CONTACT RESISTANCE : INITIAL 40mΩ MAX;
AFTER 50mΩ MAX;

4. MECHANICAL:

- 4.1. MATING FORCE: 5~20N,¹
- 4.2. UNMATING FORCE: 8~20N(INITIAL),6~20N(AFTER 10000 CYCLES)
- 4.3. FREQUENCY:200±50 CYCLES/HOUR,10000 CYCLES,¹

5. ENVIRONMENTAL:

- 5.1. OPERATION: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$