


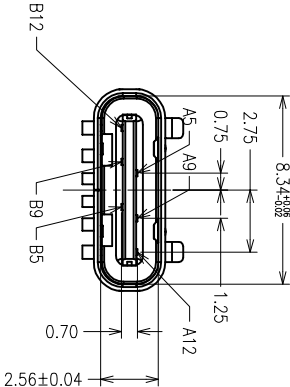
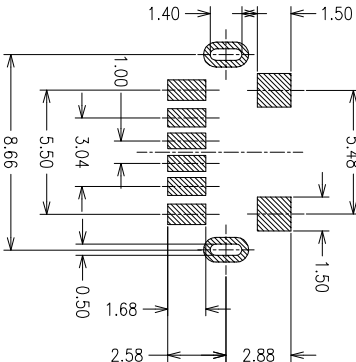



1 2 3 4 5 6 7 8 9 10

RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20




RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

Autodesk 教育版产品制作

SPECIFICATION

1. ELECTRICAL CHARACTERISTICS:
1-1. VOLTAGE/CURRENT RATING:DC 30V MAX&3A
1-2. CONTACT RESISTANCE: 40mΩ MAX INITIAL
1-3. INSULATION RESISTANCE:
1000MΩ MIN FOR VOLTAGE 1000VDC.
1-4. DIELECTRIC WITHSTAND: 100V AC for 1 MINUTE
1-5. OPERATING TEMPERATURE: -25℃~+85℃
2. MECHANICAL CHARACTERISTICS:
2-1. INSERT FORCE: 5~20N Max
2-2. WITHDRAW FORCE: 5~20N Min
2-3. LIFE TEST :5,000 CYCLES

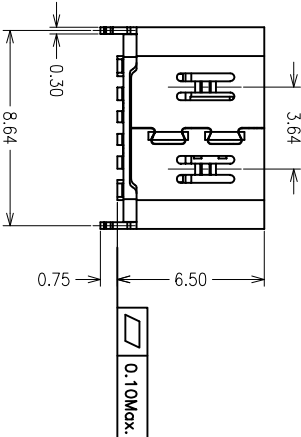

NO.	DESCRIPTION	MATERIAL	QTY
4	SHELL	STAINLESS STEEL	IPCS
3	MD	COPPER ALLOY	IPCS
2	CONTACT	COPPER ALLOY	IPCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	IPCS

产品图
PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS				制图 DRAWING				产品料号 PRODUCT PART NO.			
X	±0.30	X	±5°	X	±0.25	X	±2°	X	±1°	X	±0.5°	X	±0.30	X	±5°
XX	±0.20	XX	±2°	XX	±0.15	XX	±1°	XX	±0.5°	XX	±0.2°	XX	±0.10	XX	±1°
XXX	±0.15	XXX	±0.5°	XXX	±0.10	XXX	±0.5°	XXX	±0.2°	XXX	±0.1°	XXX	±0.05	XXX	±0.5°
DATE				2009/10/20				审核 APPD				产品名 PRODUCT NO.			
SCALE				1:1				审核 CHKD				产品名 PRODUCT NO.			
比例				1:1				审核 CHKD				产品名 PRODUCT NO.			
UNITS				MM				制图 DRAWING				产品料号 PRODUCT PART NO.			