

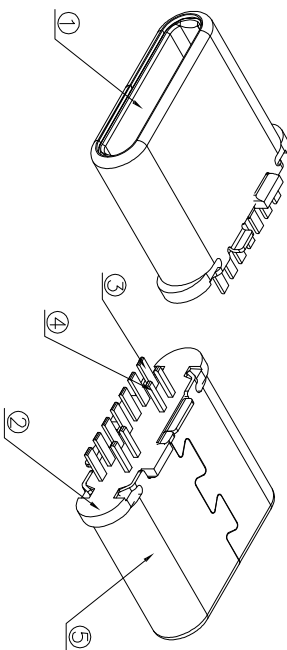


RoHS 客户图



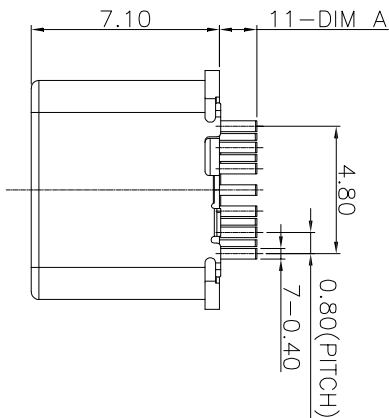


Pin Assignments And Mating Sequence:

Pin NO.	Signal Name	Mating Sequence
A1	GND	First
A4	V _{bas}	First
A5	CC1	Second
A6	Dp1	Second
A7	Dn1	Second
A9	V _{bas}	First
A12	GND	GND
Shell		GND



8PCS连料出货
备注：此为澳洲出货，除非客户另有要求为美国CS出货；

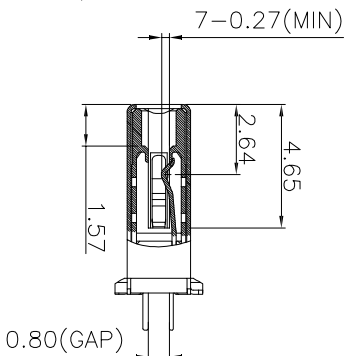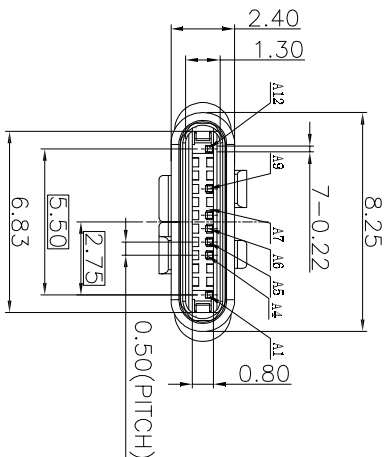


NOTE:
1.ELECTRICAL CHARACTERISTICS:
1.1 CONTACT RESISTANCE: INITIAL 40mΩ MAX;
AFTER 50mΩ MAX;

- 1.2 Rating Current:3A.
 - 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - 1.4 INSULATION RESISTANCE: 100MΩ Min
 - 1.5 OPERATING TEMPERATURE: -40℃ ~ 85℃
- 2 MECHANICAL CHARACTERISTICS:
2.1 MATING FORCE: 5~20 N.
2.2 UNMATED FORCE: 8~20N;
2.3 FREQUENCY:1000 CYCLES;

PART NO. LIST:

XFLJ003-UCAM001-A	1.40	1.60
XFLJ003-UCAM001-B	1.00	1.20
PART NO.	DIM A	DIM B

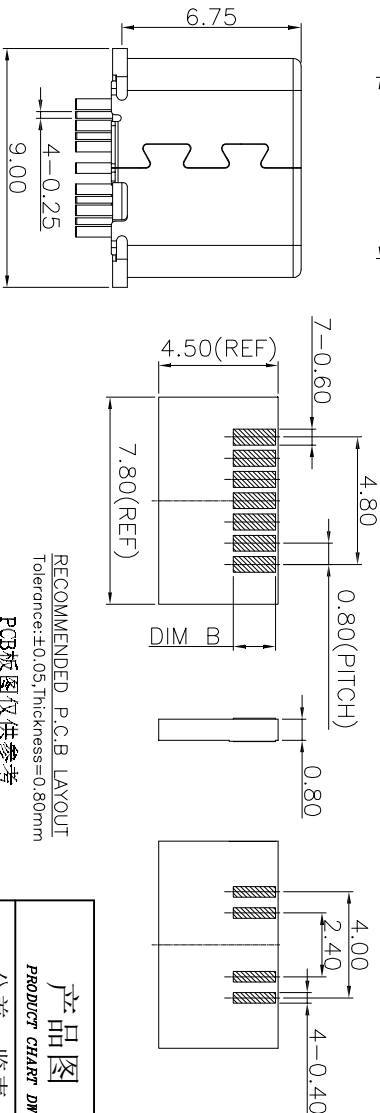

RECOMMENDED P.C.B LAYOUT
Tolerance:±0.05, Thickness=0.80mm

PCB板图仅供参考

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表				单位				制图				产品料号			
TOLERANCE UNLESS OTHERWISE				UNITS				DRAWING				PRODUCT PART NO.			
X	±0.30	X'	±5°	比例	1:1	审核	雷永健	产品名称	TYPE C 2.0 11P公头180度	角法	版本	01003-UCAM001-X			
XX	±0.25	X'	±2°	SCALE		核准	雷永健	PRODUCT NO.		VIEW	VER				
XXX	±0.15	XXX'	±0.5°	DATE	2009/10/20	APPD	雷永健								