



1 2 3 4 5 6 7 8 9 10

RoHS



客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

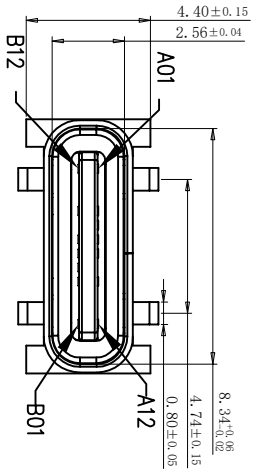


RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm


- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30m MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100M MIN. MEASURED BY 500 VDC.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.5-2.0kgf(REF.)
 - WITHDRAWAL FORCE : 0.8-2.0kgf(REF.)
 - LIFE TEST: 10,000 CYCLES.
 - TO CONFORM TO THE KRCONN HAZARDOUS SUBSTANCE FREE SPEC.

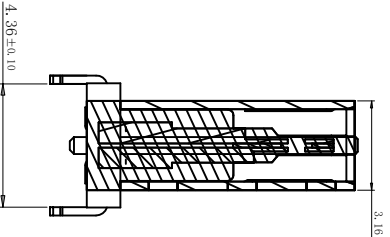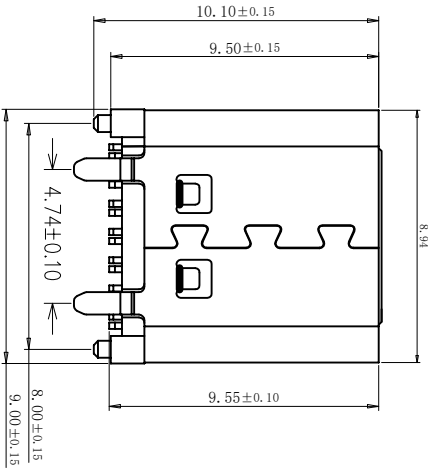

截面 1-1



11	010	112	010
12	010	112	010
13	010	112	010
14	010	112	010
15	010	112	010
16	010	112	010
17	010	112	010
18	010	112	010
19	010	112	010
20	010	112	010
21	010	112	010
22	010	112	010
23	010	112	010
24	010	112	010
25	010	112	010
26	010	112	010
27	010	112	010
28	010	112	010
29	010	112	010
30	010	112	010
31	010	112	010
32	010	112	010
33	010	112	010
34	010	112	010
35	010	112	010
36	010	112	010
37	010	112	010
38	010	112	010
39	010	112	010
40	010	112	010
41	010	112	010
42	010	112	010
43	010	112	010
44	010	112	010
45	010	112	010
46	010	112	010
47	010	112	010
48	010	112	010
49	010	112	010
50	010	112	010
51	010	112	010
52	010	112	010
53	010	112	010
54	010	112	010
55	010	112	010
56	010	112	010
57	010	112	010
58	010	112	010
59	010	112	010
60	010	112	010
61	010	112	010
62	010	112	010
63	010	112	010
64	010	112	010
65	010	112	010
66	010	112	010
67	010	112	010
68	010	112	010
69	010	112	010
70	010	112	010
71	010	112	010
72	010	112	010
73	010	112	010
74	010	112	010
75	010	112	010
76	010	112	010
77	010	112	010
78	010	112	010
79	010	112	010
80	010	112	010
81	010	112	010
82	010	112	010
83	010	112	010
84	010	112	010
85	010	112	010
86	010	112	010
87	010	112	010
88	010	112	010
89	010	112	010
90	010	112	010
91	010	112	010
92	010	112	010
93	010	112	010
94	010	112	010
95	010	112	010
96	010	112	010
97	010	112	010
98	010	112	010
99	010	112	010
100	010	112	010

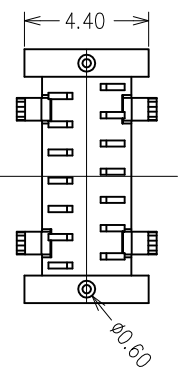

深圳市鑫风雷电子有限公司

产品图 PRODUCT CHART DWG		单位 UNITS		比例 SCALE		日期 DATE		制图 DRAWING		审核 CHECK		产品料号 PRODUCT PART NO.		产品名称 PRODUCT NAME		版本 VERSION	
公差一览表 TOLERANCE UNLESS OTHERWISE		MM		1:1		2009/10/20		审核 APPD		审核 APPD		01002-UCAF013-X		TYPE O 14P每座立式SMT		H=9.3	
X	±0.30	X	±5°	X	±2°	XX	±1°	XXX	±0.5°	XXX	±0.15	XXX	±0.5°	XXX	±0.15	XXX	±0.5°