
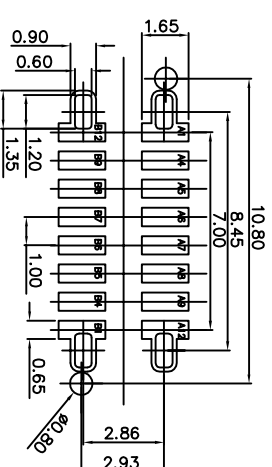
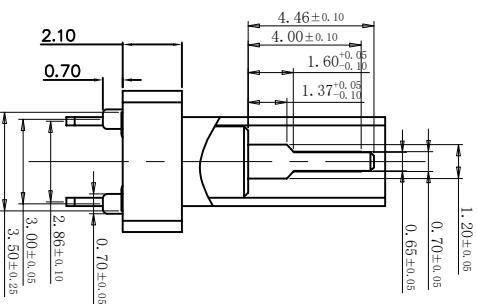
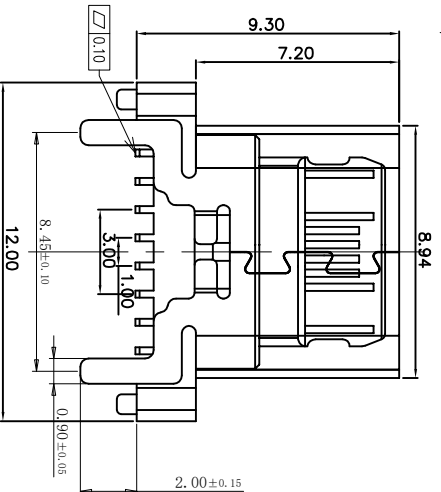
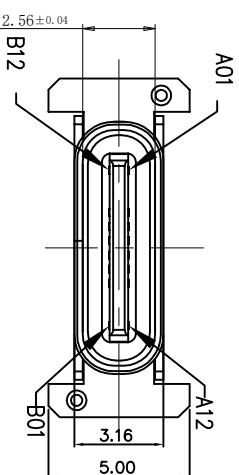
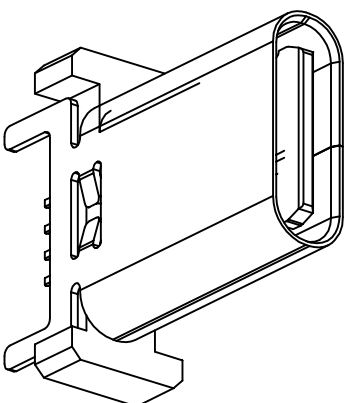


7	8	9	10
目録 MAPX	設定内容 MODIFICATION	日期 DATE	
AO	NEW	09-10-20	

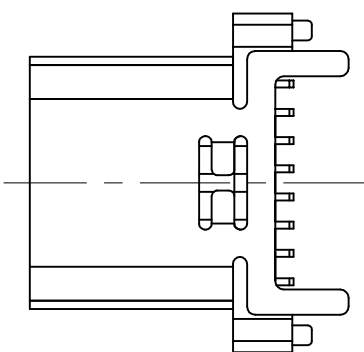

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. CONTACT RESISTANCE: 30m MAX. Ω
 - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 - 1-3. INSULATION RESISTANCE: 100M Ω MIN. MEASURED BY 500 VDC.
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE: 0.5-2.0kgf (98P.)
 - 2-2. WITHDRAWAL FORCE: 0.8-2.0kgf (98P.)
3. LIFE TEST: 10,000 CYCLES.

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

FILE	NAME	STATUS	FILE	NAME	STATUS
A1	GOB		B12	GOB	
A4	YNS		B9	YNS	
A5	CC1		B8	SMR	
A6	P71		B7	MG	
A7	ML		B6	P2	
A8	SM1		B5	C2	
A9	YNS		B4	YNS	
A15	GOB		B1	GOB	

产 品 图				深圳市鑫风雷电子有限公司											
PRODUCT CHART DWG															
公差一览表				单位		制图		王 冠		产品料号		O1002-UGAF020-X			
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING				PRODUCT PART NO.		TYPE O 10P母座立式SMT H=9.5			
X.	±0.30	X.	±5°	比例		背模		雷永健		产品名称		角法		版本	
.X	±0.25	.X'	±2°	SCALE		CHKD				PRODUCT NO.		图 示		VER	
.XX	±0.20	.XX'	±1°	日期		校样		雷永健		VIEW		图 示		A0	
.XXX	±0.15	.XXX'	±0.5°	DATE		APPD				角 法		图 示			