


NOTES:

- 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATING ALL OVER 50u" Min NICKEL AND 100u"Min Tin ALL OVER 50u" Min NICKEL ON SOLDER AREA
- 2.MECHANICAL:
SHELL: SUS304-H,T=0.30±0.03mm
SHILD: SUS304-H,T=0.12±0.03mm
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST .
DURABILITY: 10000 CYCLES
- 3.ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
- 4.ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C

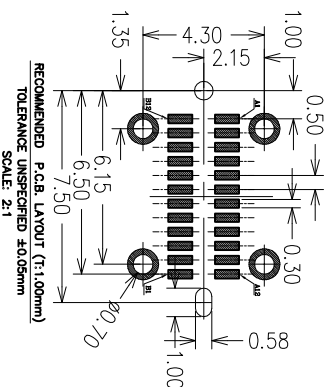

A1	GND	B12	GND
A2	SSTXP1	B11	SSRX1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRX12	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

深圳市鑫风雷电子有限公司

产品图		制图		王冠		产品料号	
PRODUCT CHART DWG		DRAWING		雷永健		O1002-UCAF009-X	
公差一览表		比例		审核		产品名称	
TOLERANCE UNLESS OTHERWISE		SCALE		核准		TYPE O 24P母座立式SMT H=11.5	
X	±0.30	X'	±5'	XXX	±0.15	XXX'	±0.5'
XX	±0.20	XX'	±1'	XXX	±0.15	XXX'	±0.5'
XXX	±0.15	XXX'	±0.5'	DATE	2009/10/20	版本	A0
		日期		APPD		VIZPW	