
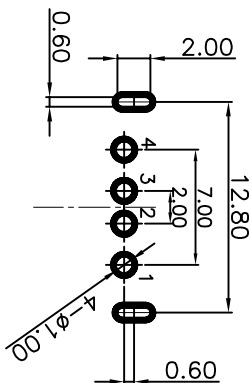







1 2 3 4 5 6 7 8 9 10

Rohs 客户图

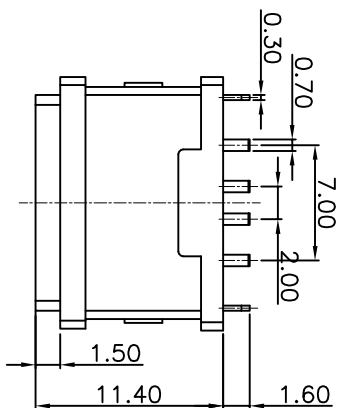


RECOMMENDED PCB LAYOUT(TOP VIEW)  
THICKNESS T=1.0mm  
DEFAULT TOLERANCE+/-0.05

- NOTES:
- SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
  2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
  3. TEMPERATURE RANGE: -30 °C ~ 85 °C
  4. CONTACT RESISTANCE: 40 MILLIONHM MAX
  5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
  6. INSERTION FORCE :10N~30N
  7. UNMATING FORCE: 8N~30N
  8. DURABILITY:1500 CYCLES

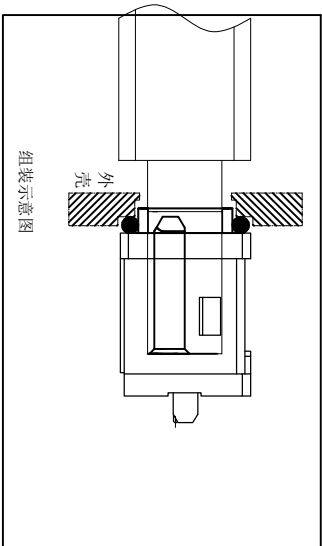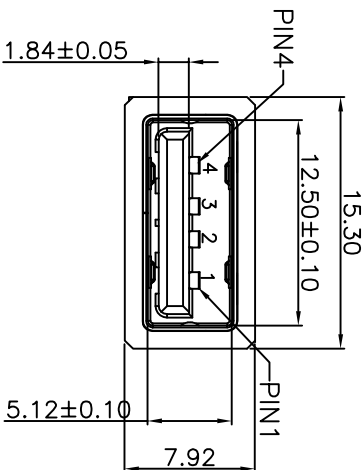

| PIN ASSIGNMENT |      |    |    |     |
|----------------|------|----|----|-----|
| PIN NO.        | 1    | 2  | 3  | 4   |
| SIGNAL NAME    | VBUS | D- | D+ | GND |



注：防水圈是圆形截面，直径为1.0mm的  
硅胶圈，防水圈挤压力量，由1.0mm挤压到  
0.4mm ~ 0.5mm, 防水效果好

| ITEM | PART NAME     | Q'TY | FINISH                                   | NOTE |
|------|---------------|------|------------------------------------------|------|
| 5    | Outer Shell   | 1    | SUS 301 1/4H                             |      |
| 4    | Inner Shell   | 1    | SUS 301 1/4H                             |      |
| 3    | PLASTIC Shell | 1    | PA10T (G.F30%)                           |      |
| 2    | Contact       | 4    | BRASS C2680-EH<br>Au/Ni Plating T=0.25mm |      |
| 1    | Housing       | 1    | PA10T (G.F30%)                           |      |

| 产品图                                  |       |       |       | 深圳市鑫风雷电子有限公司                             |            |      |                                            |
|--------------------------------------|-------|-------|-------|------------------------------------------|------------|------|--------------------------------------------|
| 公差一览表                                |       |       |       | Shenzhen xinfenglei Electronics Co., Ltd |            |      |                                            |
| TOLERANCE UNLESS OTHERWISE SPECIFIED |       |       |       | 单位                                       | MM         | 制图   | 产品料号                                       |
| X                                    | ±0.30 | X'    | ±5°   | UNITS                                    |            | 王冠   | 00208-U2AF004-X                            |
| X                                    | ±0.25 | X'    | ±2°   | SCALE                                    | 1:1        | 雷永健  | 产品名称                                       |
| .XX                                  | ±0.20 | .XX'  | ±1'   | DATE                                     | 2009/10/20 | 雷永健  | PRODUCT NO.                                |
| .XXX                                 | ±0.15 | .XXX' | ±0.5° | 核准                                       | 廖永健        | 联系方式 | mailbox: sale@xfll.com, www. xfll.com. com |