

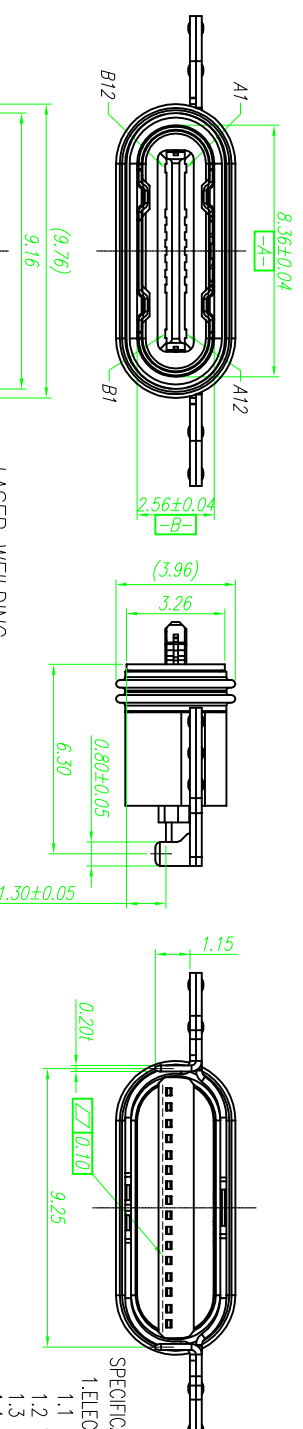
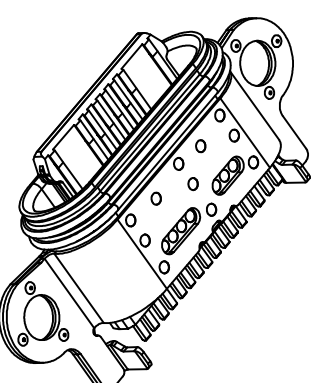


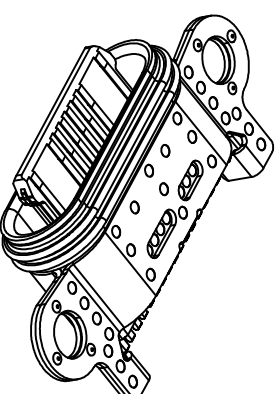

1.ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 6A
- 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.
- 2.MECHANICAL CHARACTERISTICS
 - 2.1 INSERTION FORCE: 5~20N
 - 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
 - 2.3 DURABILITY:10,000CYCLES
- 3.THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

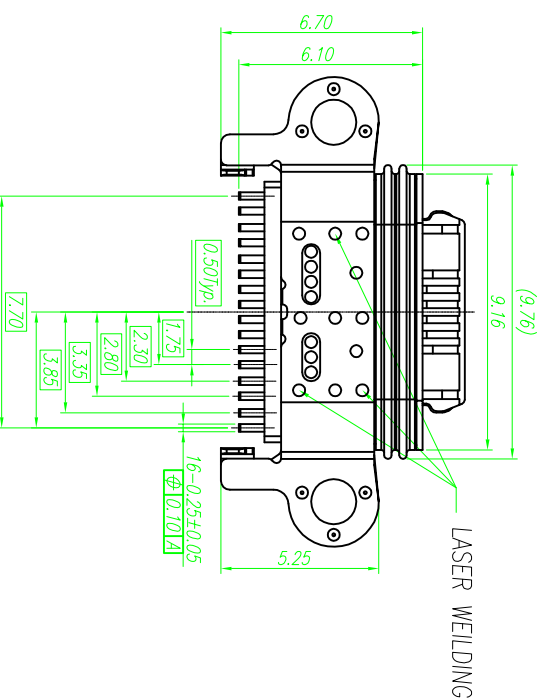



PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

[illegible]

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

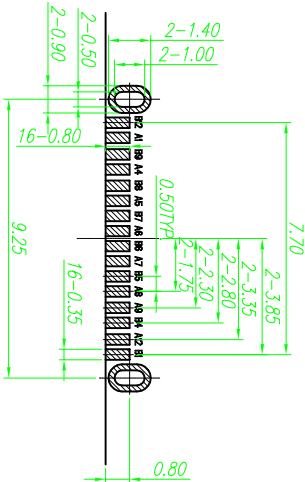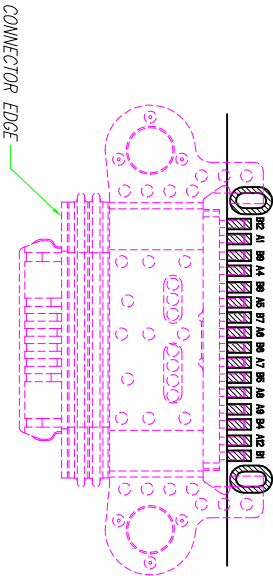

PIN ASSIGNMENT

Pin	Signal Name	Pin	Signal Name	Pin	Signal Name	Pin	Signal Name
A1	GND	B12	GND	A7	D-	B6	D+
A2	TX1+	B11	RX1-	A8	SBU1	B5	CC2
A3	TX1-	B10	RX1+	A9	VBUS	B4	VBUS
A4	VBUS	B9	VBUS	A10	RX2-	B3	TX2+
A5	CC1	B8	SBU2	A11	RX2+	B2	TX2+
A6	D+	B7	D-	A12	GND	B1	GND

P.C.B LAYOUT VIEW

TOLERANCE ±0.05

4	MID_PLATE	1 PCS	STAINLESS STEEL	Ni Plated
3	CONTACT	1 SET	COPPER ALLOY	Au & Ni Plated
2	MOLDING HOUSING	1 PCS	PLASTIC	None
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

产品图

PRODUCT CHART DWG



深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHKD	产品料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	角法 VIEW	版本 VER
X	±0.30	X'	±5°	MM	王冠	雷永健	19009-UCAF009-X	TYPE C 16P母座沉板1.3 外露古片	⊕	A0
X	±0.25	X'	±2°	SCALE	1:1	雷永健		1.4 防水型带螺丝孔 2.01H 1-8.10	⊕	
.XX	±0.30	.XX'	±1°	DATE	2009/10/20	雷永健			⊕	
.XXX	±0.15	.XXX'	±0.5°	APPD					⊕	

1 2 3 4 5 6 7 8 9 10

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

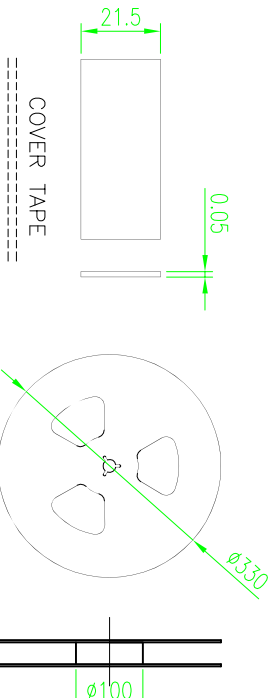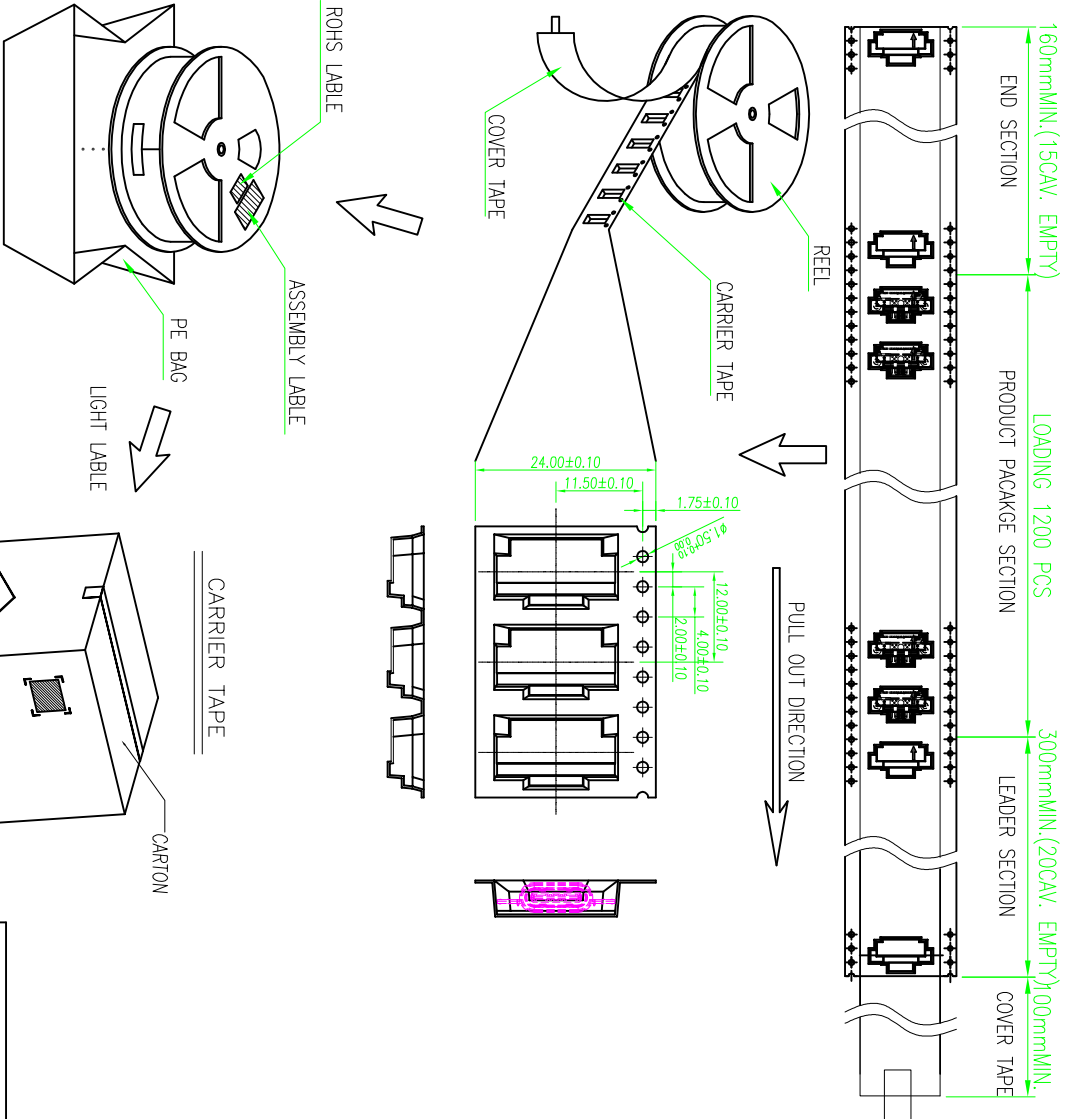

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:

- 2.1 REEL: W=24.5, $\phi A=330$
- 2.2 CARRIER TAPE: T=0.30 W=24.0
- 2.3 COVER TAPE: T=0.05 W=21.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=365mm

3. QUANTITY :

- 3.1 PRIMARY PACKING: 1200PCS/REEL
- 3.2 SECONDARY PACKING: 12 REELS/CARTON(14400PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

4.1 PEELING SPEED: 300mm/minutes

4.2 PEELING ANGLE: 165° ~180°

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.	19009-UCAF009-X
X	±0.30	X'	±5'	比例 SCALE	王冠	产品名称 PRODUCT NO.	TYPE C 16P母座沉板1.3 外露舌片
.X	±0.25	.X'	±2'	日期 DATE	审核 CHKD	1.4 防水型带螺纹孔	2.01H L=8.10
.XX	±0.30	.XX'	±1'	核准 APPD	雷永健	版本 VER	A0
.XXX	±0.15	.XXX'	±0.5'				