
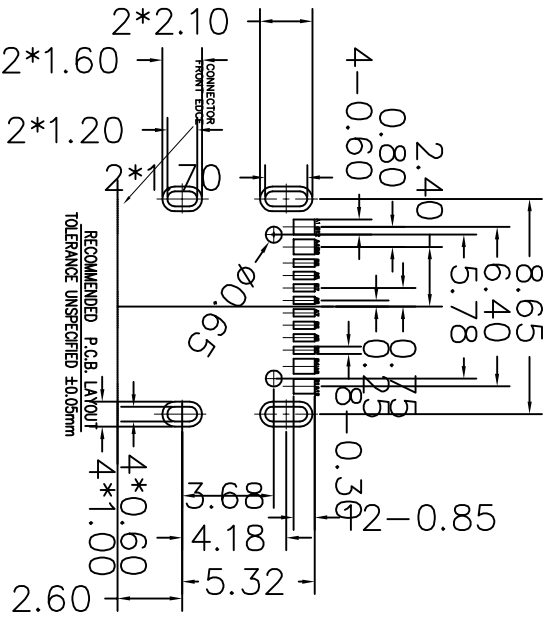
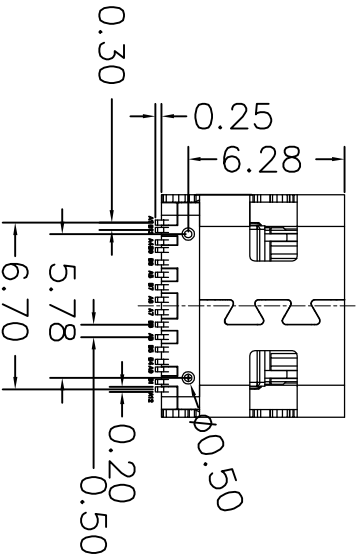
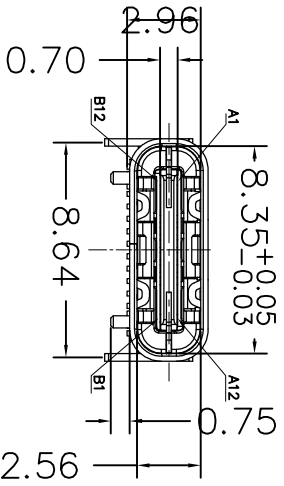
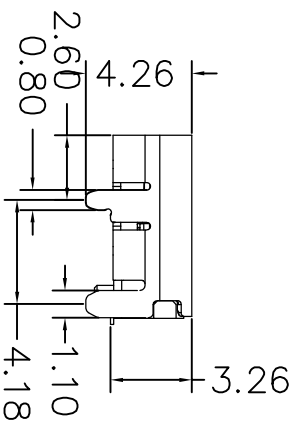


ROHS

客户图



- NOTES:
SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 5,000 CYCLES

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图

深圳市鑫风雷电子有限公司

公差一览表		单位		MM		制图		王冠		产品料号		19001-UCAP016-X	
TOLERANCE UNLESS OTHERWISE		UNITS		MM		DRAWING		冠		PRODUCT PART NO.		19001-UCAP016-X	
X	±0.30	X	±5°	比例		审核		雷永健		产品名称		TYPE C母座单排16P无弹后定位	
XX	±0.25	X	±2°	SCALE		CHD		雷永健		PRODUCT NO.			
XXX	±0.15	XXX	±1°	DATE		APPD		雷永健		角法		版本	
			±0.5°	2009/10/20						角法		A0	