

1 2 3 4 5 6 7 8 9 10

RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

SPECIFICATION

MATERIAL

See drawing
STANDARD DATA

Rating current:5.0 A

ELECTRICAL

Insulator resistance: 100Mohms Min.

Withstanding voltage: 100 VAC / minute


Contact resistance: 40mohms Max.

MECHANICAL

Mating force: 5~20N Max.

Umating force : 8~20N Min.

Durability: 10,000 cycles Min.

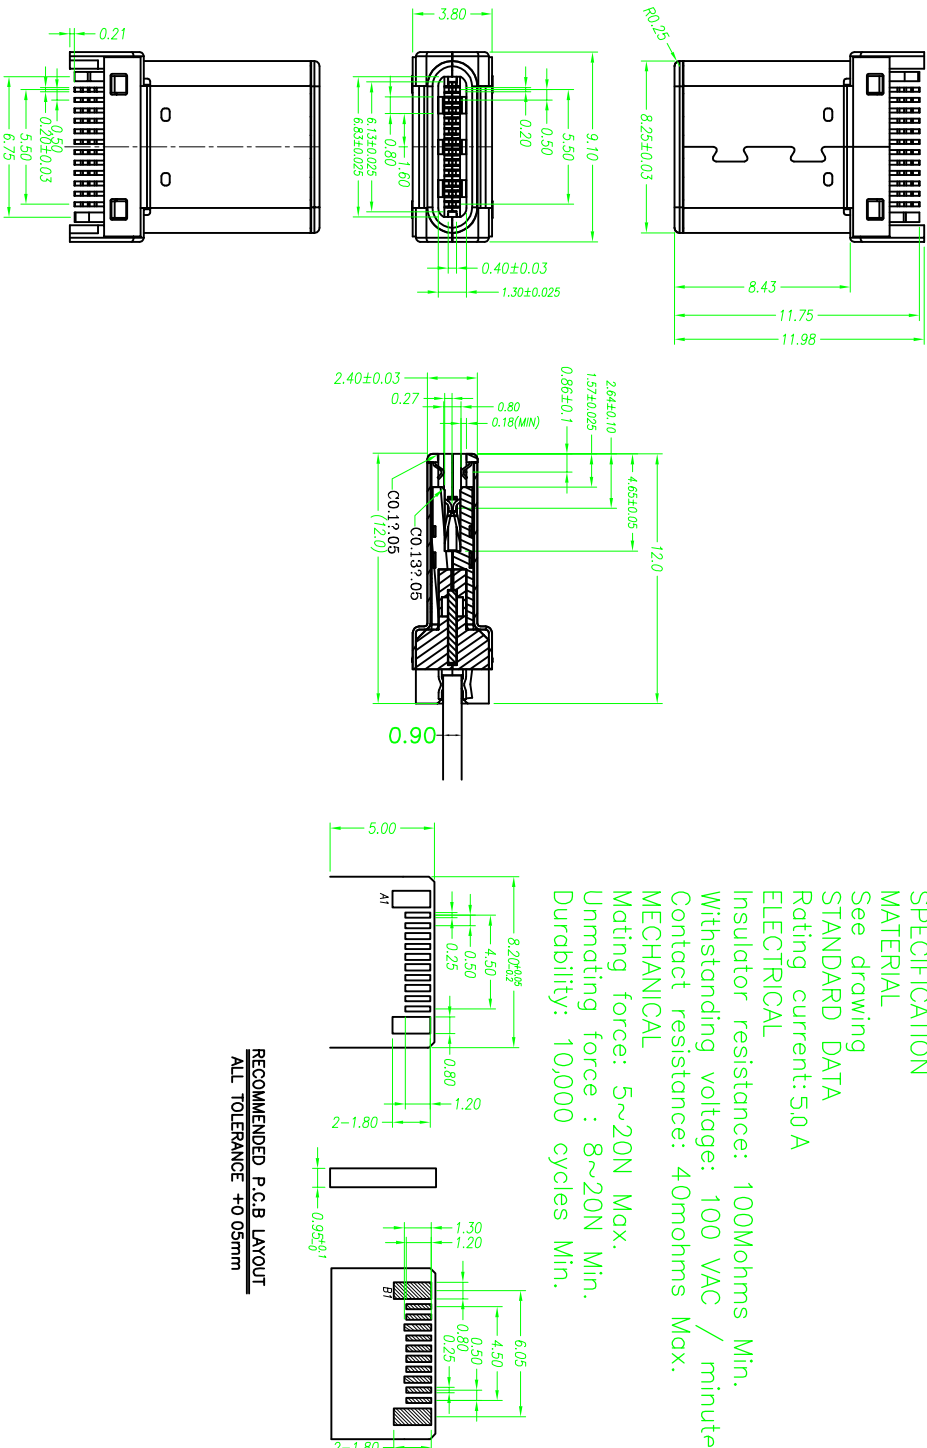

RECOMMENDED P.C.B LAYOUT
ALL TOLERANCE +0.05mm

ITEM	PARTS NAME	Q'TY	MATERIAL	FINISH/REMARK
1	SHELL	1	STAINLESS	Ni:50u"
2	Molding HOUSING	2	SYNTHETIC RESIN	(Black)
3	GND SPRING	2	STAINLESS	Ni:50u"
4	Insert molding 12PIN	2	SYNTHETIC RESIN	(Black)
5	CONTACT	24	COPPER ALLOY	Contact area:gold flash, Solder tails:Tin100u", Ni:50u"
6	LATCH	1	STAINLESS	Ni:50u"
7	SHELL COVER	1	HIGH CARBON STEEL	Ni:50u"

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	王冠	产品料号 PRODUCT PART NO
X	±0.30	X'	±5°	MM	审核	雷永健	19002-UCAM004-X
X	±0.25	X'	±2°	SCALE	核准	雷永健	产品名称 TYPE
.XXX	±0.15	.XXX'	±1°	DATE	2009/10/20	雷永健	角法 PRODUCT NO
			±0.5°	DATE	2009/10/20	雷永健	版本 VER
							A0