

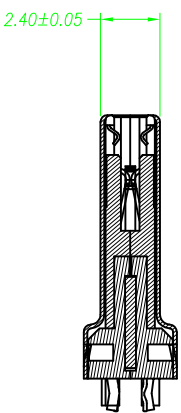



# ROHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

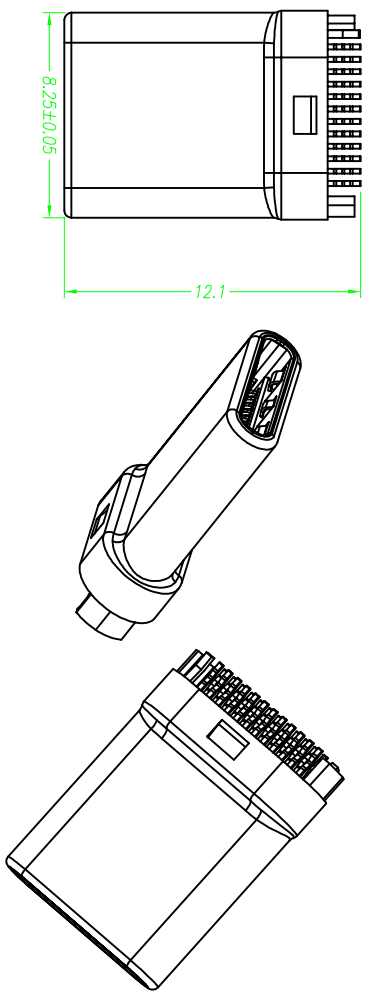

**SPECIFICATION**  
**MATERIAL**  
 See drawing  
**STANDARD DATA**  
 Rating current:3.0A  
**ELECTRICAL**  
 Insulator resistance: 100Mohms MIN  
 Withstanding voltage: 100 VAC /minute  
 Contact resistance: 40mohms MAX  
**MECHANICAL**  
 Mating force: 5~20N MAX  
 Umating force: 6~20N MIN  
 Durability: 10,000 cycles min

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Ybus	SBU1	D-	D+	CC	Ybus	TX1-	TX1+	GND
GND	TX2+	TX2-	Ybus	Ycan	SBU2	Ybus	RX1-	RX1+	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

ITEM	PARTS NAME	Q'TY	MATERIAL	FINISH/REMARK
1	SHELL	1	SUS316L	Ni:50U*
2	Molding HOUSING	2	LCP E130I	黑色
3	GND SPRING	2	SUS304	
4	Insert molding 12PIN	2	LCP E130I	黑色
5	CONTACT	24	C7025	Contact areagold flash, Solder talistin 100U *Ni:50U*
6	LATCH	1	SUS301	Ni:30U*
7	SHELL COVER	1	SUS301	

## 产品图

## 深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	19002-UCAM005-X
X	±0.30	X	±5°	审核 CHECK	雷永健	产品名称 PRODUCT NO.	TYPE C公头拉伸不带板
XX	±0.25	X	±2°	日期 DATE	雷永健	角法 VIEW	
XXX	±0.15	.XXX	±0.5°	2009/10/20	核准 Appd	版本 VER	A0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION