
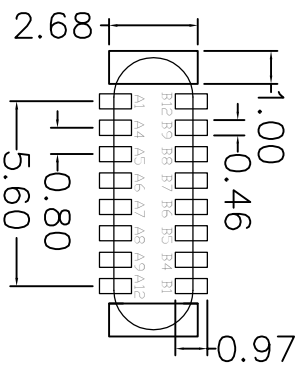
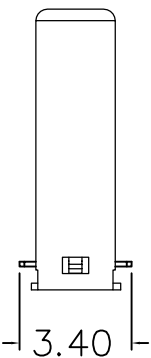
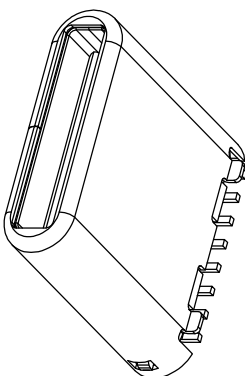

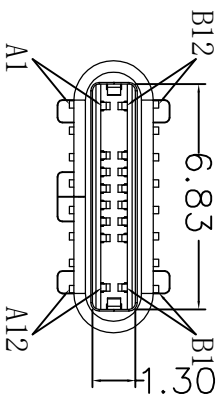
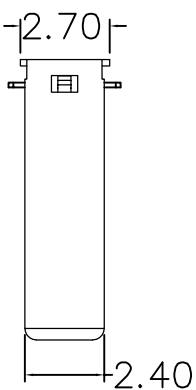


1 ROHS

2 客户图

3 4 5 6 7 8 9 10

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

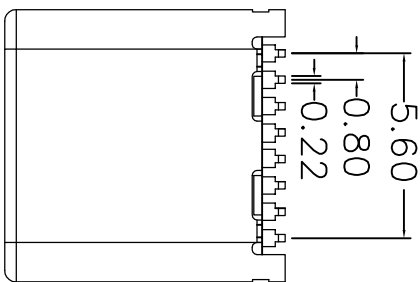

- 备注:
1. 材质: LCP+30%G. F UL94V-0
 - 1.2端子: C2680, T=0.20mm; 镀半金锡
 - 1.3外壳: 不锈钢, T=0.15mm; 表面镀镍
 - 1.4卡钩: 不锈钢, T=0.40mm; 表面镀锡
 2. 主要特性:
 - 2.1 额定电流: 3A
 - 2.2 接触阻抗: 40mΩ MAX
 - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度250±5°C
 - 2.6 整体插入力: 2.0kgf MAX
 - 2.7 使用寿命: 10000次
 - 2.8 工作温度: -30°C~+80°C

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	19001-UCAM044-A
X	±0.30	X'	±5'	审核 CHECK	雷永健	产品名称 PRODUCT NO.	Type C 16P公头180度立式SMT H=8.5微胶
XX	±0.25	X''	±2'	核准 APPROVE	雷永健	角法 VIEW	
XXX	±0.15	XXX'	±0.5'	日期 DATE		版本 VER	A0