
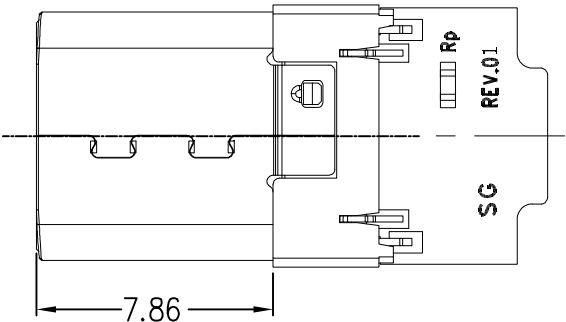
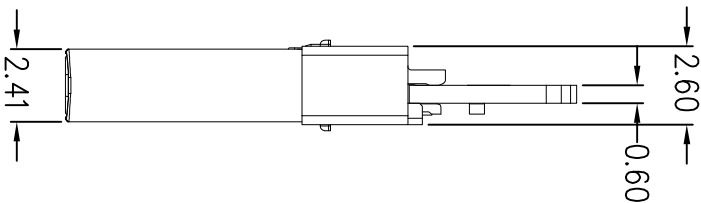
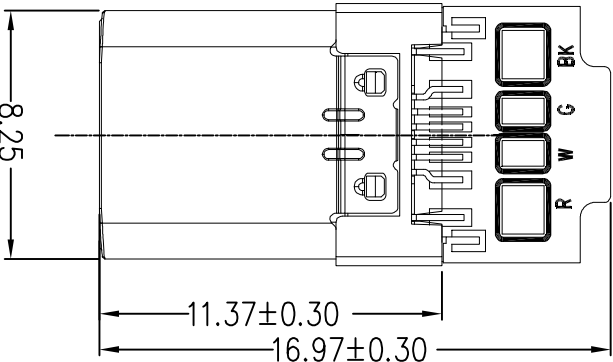



1 2 3 4 5 6 7 8 9 10

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

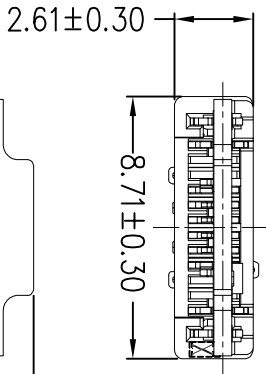

- 备注:
- 材质:
 - 1.1胶芯: LCP+30%G.F UL94V-0
 - 1.2端子: C5210, T=0.20mm 镀半金锡
 - 1.3外壳: 不锈钢, T=0.15mm 表面镀镍
 - 1.4卡钩: 不锈钢, T=0.25mm 表面镀锡
 - 主要特性:
 - 2.1额定电流: 3A
 - 2.2接触阻抗: 40mΩ MAX
 - 2.3绝缘阻抗: 100MΩ MIN 250V DC
 - 2.4耐压测试: 100V AC
 - 2.5沾锡性: 温度250±5℃
 - 2.6整体插入力: 2.0kgf MAX
 - 2.7使用寿命: 10000次
 - 2.8工作温度: -30℃~+80℃



产品图
PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	王冠 CHAO	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NO.
.XX	±0.30	.XX'	±2°	日期 DATE	2009/10/20	批准 APPD	角法 VIEW
.XXX	±0.15	.XXX'	±0.5°				