
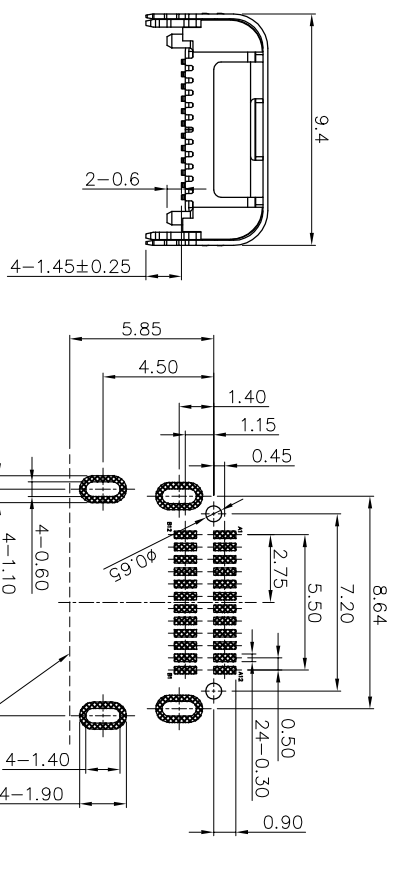
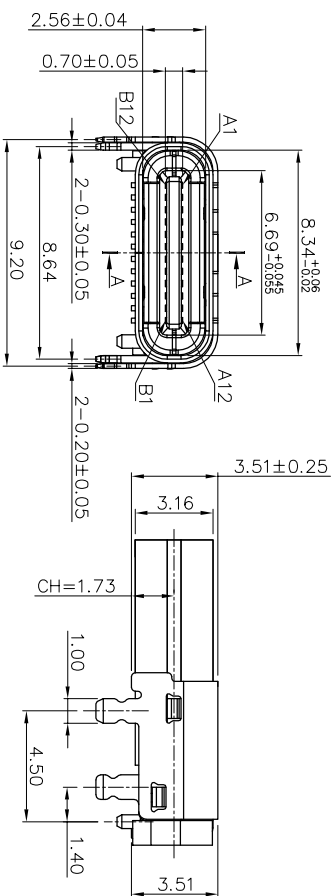


1 2 3 4 5 6 7 8 9 10

Rohs 客户图



目錄 MAPX	變更內容 MODIFICATION	日期 DATE
40	NEW	09-10-20

NOTE:
1. MATERIAL:
1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94V-0;
1.2 CONTACT: COPPER ALLOY
1.3 SHELL: STAINLESS STEEL
2. PLATING
2.1 TERMINAL CONTACT: (SEE TAB) SELECTIVE GOLD PLATING IN THE CONTACT AREA AND G/F PLATING IN THE SOLDER TAIL AREA WITH 50u" NICKEL UNDER PLATING OVERALL.
2.2 SHELL: 50u" Min. NICKEL ALL OVER.

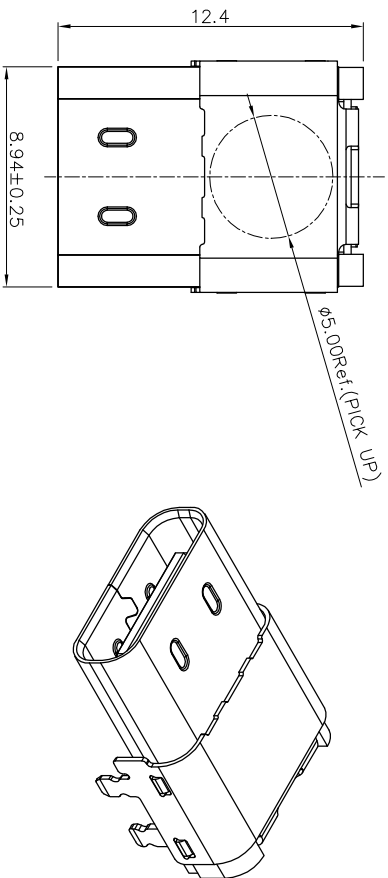

RECOMMENDED P.C.B LAYOUT (TOP VIEW)

SECTION "A-A"

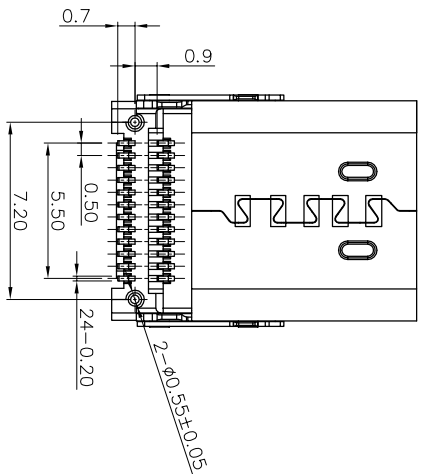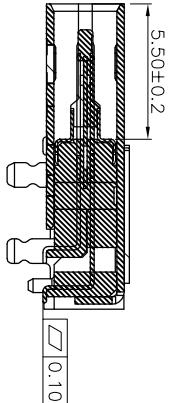

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.	20009-UCAP002-X
X	±0.30	X	±5°	比例 SCLAS	1:1	审核 CHECK	雷永健
XX	±0.25	X	±2°	日期 DATE	2009/10/20	核准 APPR	雷永健
XXX	±0.30	XX	±1°			角法 VIEW	版本 VER
	±0.15	XXX	±0.5°				40

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION