
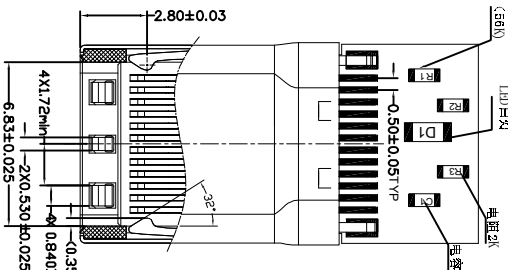
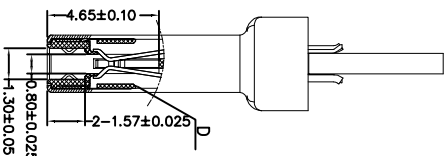
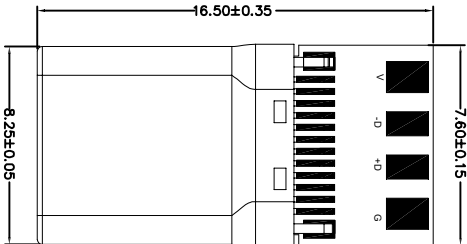
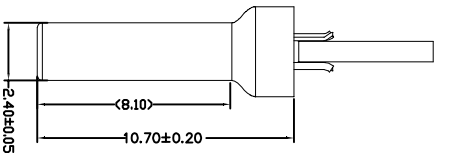


1 2 3 4 5 6 7 8 9 10


Rohs 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



Pin Number	host	device	Pin Number	host	device
Pin A1	GND	GND	Pin B12	GND	GND
Pin A2	SS1xp1	SS1xp1	Pin B11	SS8xp1	SS8xp1
Pin A3	SS1xp1	SS1xp1	Pin B10	SS8xp1	SS8xp1
Pin A4	VBUS	VBUS	Pin B9	VBUS	VBUS
Pin A5	ICCI	ICCI	Pin B8	SBU2	SBU2
Pin A6	DP1	DP1	Pin B7		
Pin A7	DN1	DN1	Pin B6		
Pin A8	SBU1	SBU1	Pin B5	CC2	CC2
Pin A9	VBUS	VBUS	Pin B4	VBUS	VBUS
Pin A10	SS8xp2	SS8xp2	Pin B3	SS1xp2	SS1xp2
Pin A11	SS8xp2	SS8xp2	Pin B2	SS1xp2	SS1xp2
Pin A12	GND	GND	Pin B1	GND	GND

- 备注
1. 材料: See Table A
 2. 电镀要求: See Table A
 3. 机械性能:
插入力: 5-20N
拔出力: 8-20N
耐久次数: 10,000次
 4. 电气特性:
控制阻抗: 50Ohms Max(after)
热稳定性: 100Mhms Min
耐压: AC 100V/1分钟
额定电流:
5A for VBUS For A1/A8/B4/B9
1.25A for Vcom and GND for A1/A12, B1/B5/B9/B2
0.25A for all other contacts.
 5. 使用物料及制程符合RoHS/E.

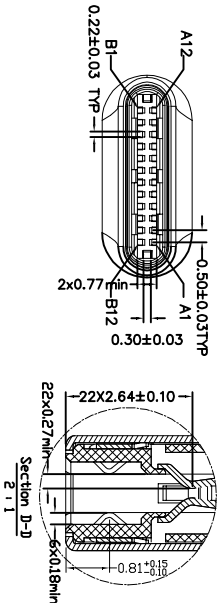

6	LATCH	STAINLESS	: Ni: 50u"
5	CONTACT	COPPER ALLOY	Contact area: 5u", Solder tails: Tin80u", Ni: 30~80u"
4	molding 2	L.C.P	(Black)
3	GNDSPRING	STAINLESS	
2	Molding	L.C.P	(Black)
1	SHELL	STAINLESS	Ni: 50u"

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS			
X	±0.30	X'	±5°	X	±0.25	X'	±2°
.XX	±0.20	.XX'	±1°	.XX	±0.15	.XX'	±0.5°
.XXX	±0.15	.XXX'	±0.5°	DATE	2009/10/20	核准	雷永健
产品料号 PRODUCT PART NO.				25012-UCAM013-X			
产品名称 PRODUCT NO.				TYPE C公头拉伸壳C-2数据板带白灯壳壳			
角法 VIEW				版本 VER			
				A0			