
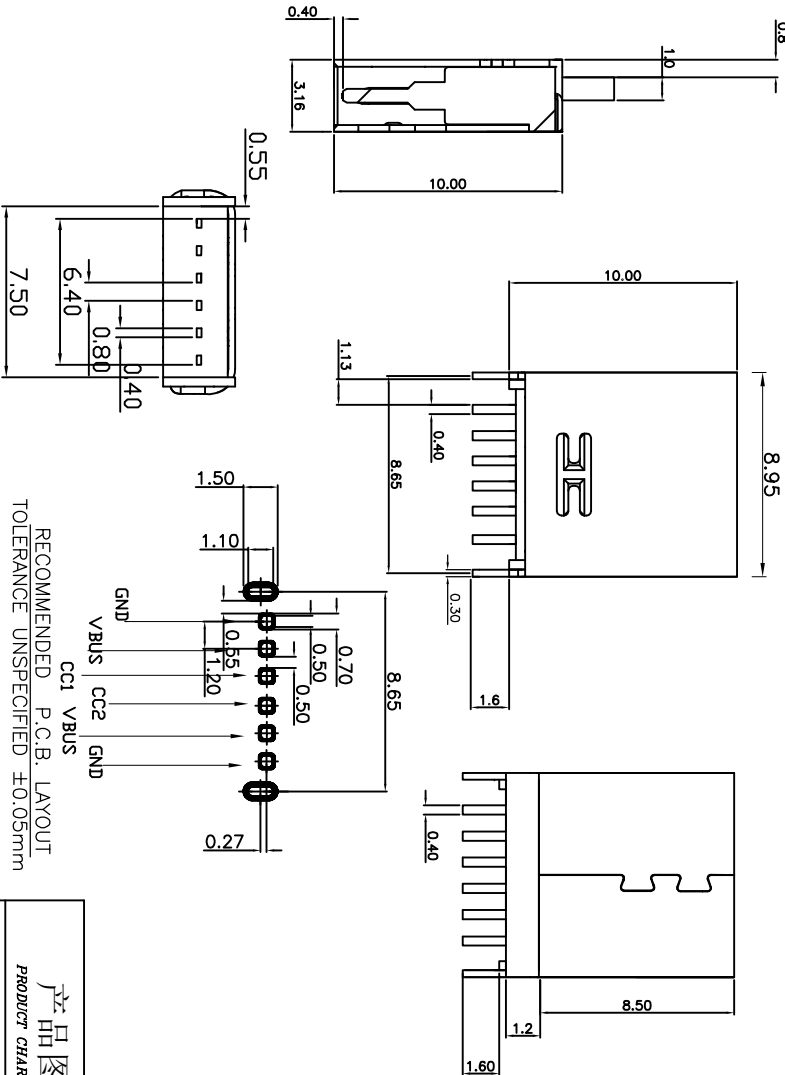


1 2 3 4 5 6 7 8 9 10

RoHS 客户图



- NOTES:
- 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u”
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H.T=0.30±0.03mm
50u” NICKEL PLATING OVER ALL.
 - 2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
 - 3.ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
 - 4.ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C
 5. 尺寸标注事项:
图示有标 者为首样全检, 重点管控尺寸.
 6. 产品符合RoHS标准

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

产品图
PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	X	X'	±5°
X	±0.30	X'	±2°
.XX	±0.25	.XX'	±1°
.XXX	±0.15	.XXX'	±0.5°

深圳市鑫风雷电子有限公司

单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	26013-UCAF002-B
比例 SCALE	1:1	审核 CHD	雷永健	产品名称 PRODUCT NO.	TYPE C 6P母座180度DIP H=10.0
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER
					A0