

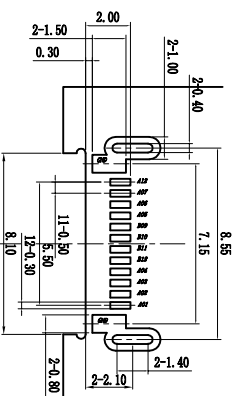

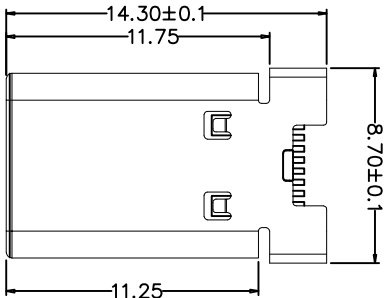


1 2 3 4 5 6 7 8 9 10

Rohs 客户图

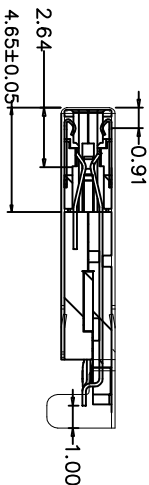

Recommended top mount P.C.B layout
Tolerance ± 0.05

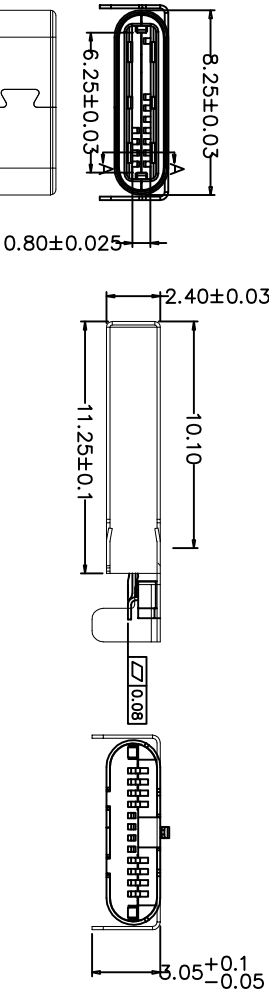

NOTES:
1.MATERIAL:SEE NOTES 1

2.FINISH:
2.1 CONTACT:GOLD PLATING ON CONTACT AREA,MATTE TIN PLATING ON SOLDER TAIL AREA,NICKEL UNDER PLATING.
2.2 SHELL:SOLDERABILITY NICKEL PLATING OVER ALL SPEC:

Insertion Force Within the range from 5 N to 20 N.
Extraction Force Within the range 8 N to 20 N,from 1 to 1,000 cycles and Within the range 6 N to 20 N,from 1,000 to 10,000 cycles

3.标" ▲"为重点管控尺寸

06	TYPE-C 12P N EM 端子	SUS304-H	2PCS	产品表面清洗	
05	TYPE-C 12P N SMT 端子	SUS304-Y/H	1PCS	产品表面镀可焊锡50U"以上	
04	TYPE-C 12P N SMT 端子	SUS304-H	1PCS	产品表面镀可焊锡50U"以上	
03	TYPE-C 12P N EM 壳体	LCP-EM 端子	1SET	黑色	
02	TYPE-C 12P N SMT 4P 壳体	LCP-4P N端子	1SET	LCP本色, 端子打锡底50U"以上, 后端镀锡	
01	TYPE-C 12P N SMT 8P N壳体	LCP-8P N端子	1SET	120U"以上, 前端选择镀金/G/F	
NO	PART NAME	MATERIAL	Q'TY	PLATING/COLOR	P.N

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHKD	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	比例 SCALE	1:1	王冠	00402-UCAM002-X
X	±0.25	X'	±2°	日期 DATE	2009/10/20	雷永健	产品名称 PRODUCT NO.
.XX	±0.30	.XX'	±1°	核准 APPD	雷永健	角法 VIEW	TYPE C公头12P 外壳DIP
.XXX	±0.15	.XXX'	±0.5°			版本 VER	AO