

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

1. 材料

- A. 主体: LCP, 黑色, 白色, UL 94-V0;
B. 端子: H65铜, 电镀刷金;
C. 外壳: 不锈钢, 镀全镍;

2. 主要特性






- A. 电压等级: 20V AC;
B. 电流: 3A;
C. 工作温度: -40° C~85° C;

3. 电气要求:

- A. 接触电阻: 40mΩ Max. (初始), 50mΩ Max. (最后);
B. 电压: 100V AC 1分钟;
C. 绝缘电阻: 100MΩ min. DC 500V;

4. 机械性能:

- A. 插入力: 5~20N. (从1~3,000次);
B. 拔出力: 8~20N. (从1~1,000次);
6~20N. (从1,001~3,000次);
C. 耐久性寿命: 3,000次;

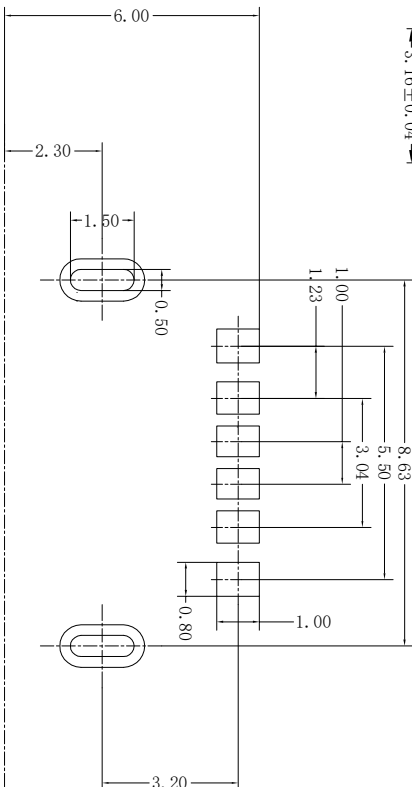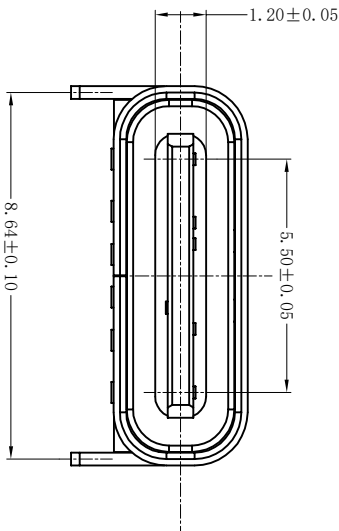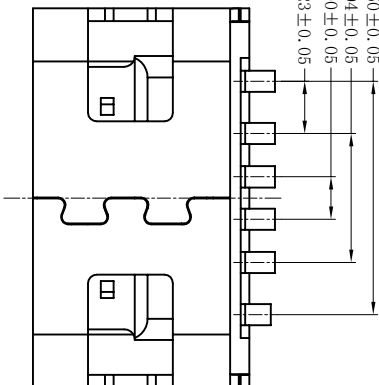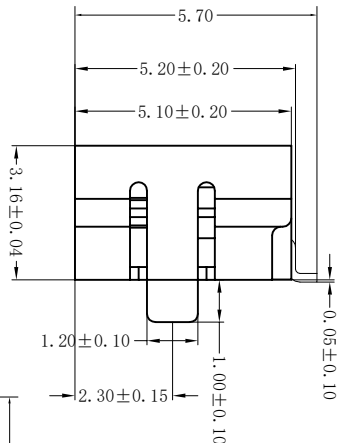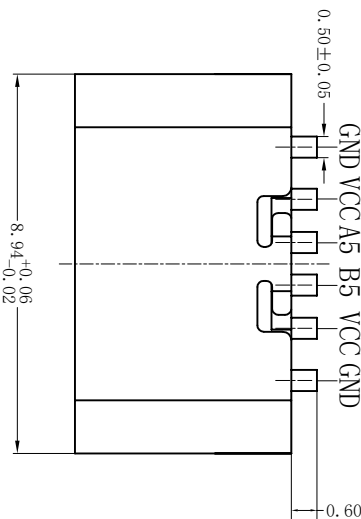

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

产品图

PRODUCT CHART DWG

公差一览表

公差一览表				单位				比例				日期				角法			
TOLERANCE UNLESS OTHERWISE				UNITS				SCALE				DATE				VIEW			
X	±0.30	X'	±5°	X	±0.25	X'	±2°	XX	±0.30	XX'	±1°	XXX	±0.15	XXX'	±0.5°				
Shenzhen xinfenglei Electronics Co., Ltd				MM				1:1				2009/10/20				AO			
PRODUCT NO.				DRAWING				SCALE				DATE				VIEW			
00606-UCAF007-X				王冠				1:1				2009/10/20				AO			
PRODUCT NAME				审核				1:1				2009/10/20				AO			
TYPE C 6P母座SMT 两脚 L=5.1				雷永健				1:1				2009/10/20				AO			
VERSION				雷永健				1:1				2009/10/20				AO			