

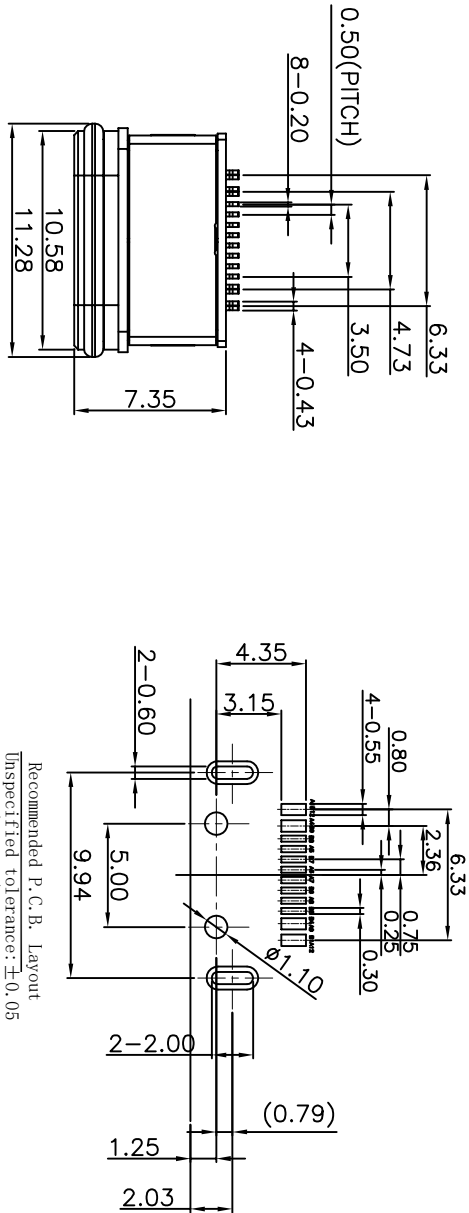

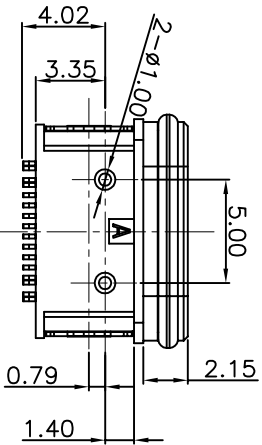


# ROHS 客户图

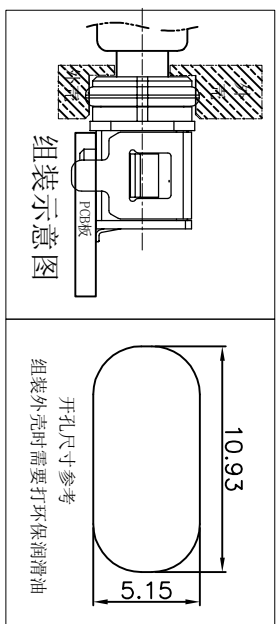


Recommended P.C.B. Layout  
Unspecified tolerance:  $\pm 0.05$   
(Top view)

- SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
  2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
  3. TEMPERATURE RANGE:  $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
  4. CONTACT RESISTANCE: 40 MILLIONHM MAX
  5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
  6. INSERTION FORCE : 5N~20N
  7. UNMATING FORCE: 8N~20N
  8. DURABILITY: 10,000 CYCLES
  9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8.

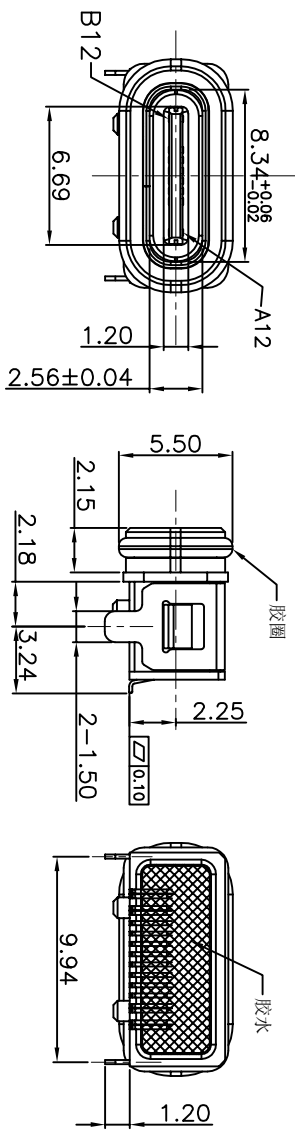

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



5	Shell2	1	SUS301 Ni Picking T=0.20mm	Ni:40u"Min:
4	Shell1	1	SUS301 Ni Picking T=0.25mm	Ni:40u"Min:
3	Housing2	1	PA10T(G.F30%)	
2	Contact	6	Phosphor bronze C5210R-EH Au/Ni Pating T=0.20mm	Ni:40u"Min: Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

## 产品图

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表		单位		比例		日期	
TOLERANCE UNLESS OTHERWISE		UNITS		SCALE		DATE	
X	±0.30	X	±5'	1:1	2009/10/20		
XX	±0.25	X'	±2'				
XXX	±0.15	XXX'	±1'				
PRODUCT CHART DWG		DRAWING		审核		批准	
Shenzhen xinfenglei Electronic Co., Ltd		王冠		雷永健		雷永健	
00208-UCAR011-X		产品料号		产品名称		联系方式	
		00208-UCAR011-X		Type C 16p板上防水连接器		mailbox: sale1@xfll.com	
				Type C 16p板上防水连接器		www.xfll.com	