

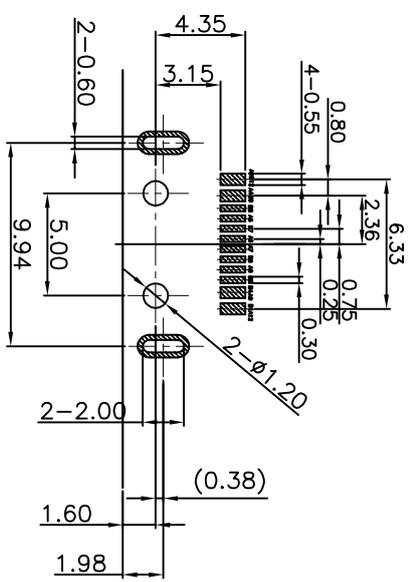

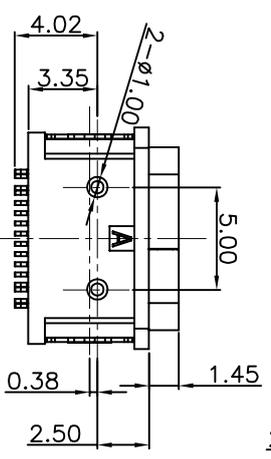
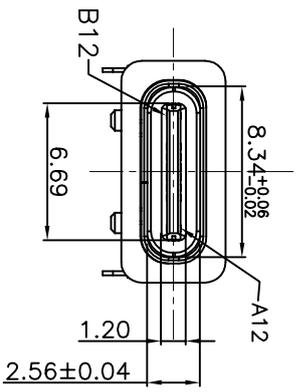
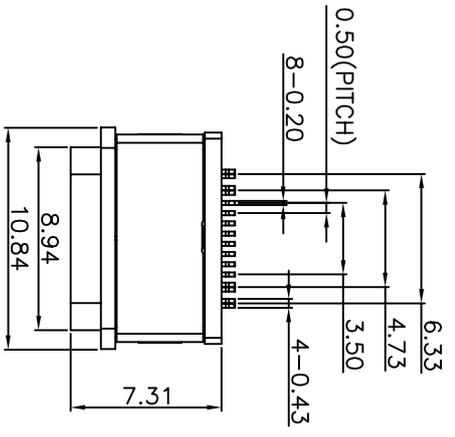
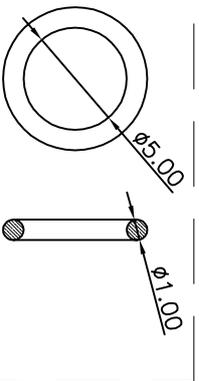


ROHS 客户图




Recommended P.C.B. Layout
Unspecified tolerance: ±0.05
(Top view)

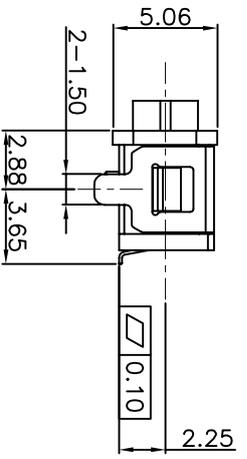

注: 防水圈是圆形截面, 直径为1.0mm的硅胶圈, 防水圈挤压力, 由1.0mm挤压到0.5mm ~ 0.6mm, 防水效果好

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES
9. WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8.



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	Shell2	1	SUS301 Ni Picking T=0.20mm	Ni:400"Min:
4	Shell1	1	SUS301 Ni Picking T=0.25mm	Ni:400"Min:
3	Housing2	1	PA10T(G.F30%)	
2	Contact	6	Phosphor bronze C5210R-EH Au/Ni Pating T=0.20mm	Ni:400"Min: Au:CONTACT AREA:30", OTHER AREA:G/F
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差	UNIT	SCALE	DATE
X	±0.30	MM	1:1	2009/10/20
X	±0.25	MM	1:1	
XX	±0.30	MM	1:1	
XXX	±0.15	MM	1:1	

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

王冠 雷永健 雷永健
Rongguang Fengyongjian Fengyongjian

00208-UCAR007-X
Type C 16p板上防水带柱两脚

mailbox: salecf@xfli.com.com
www.xfli.com.com