

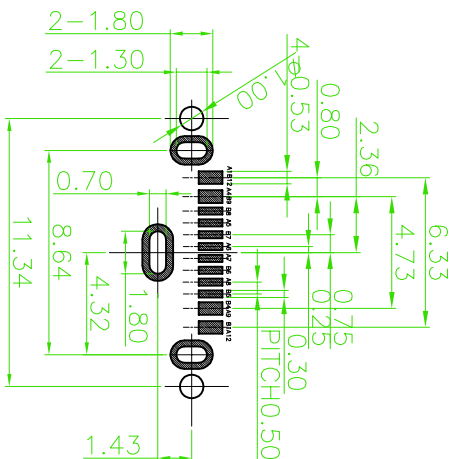


RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

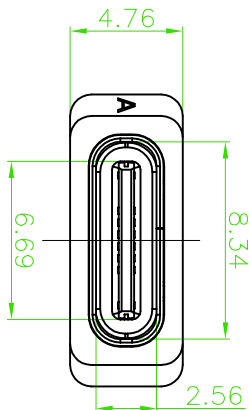







RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE:±0.05)



NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES

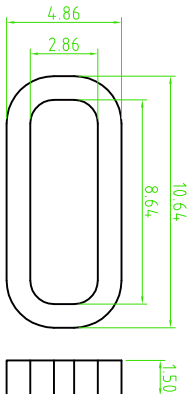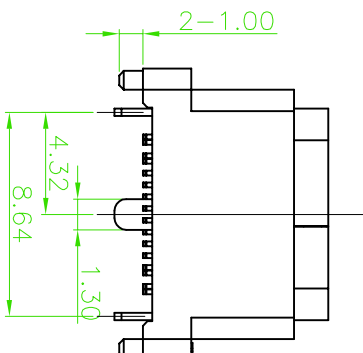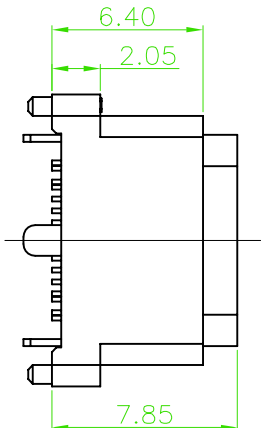

??????

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

产品图

深圳市鑫风雷电子有限公司

公差一览表				单位				制图				产品料号			
TOLERANCE UNLESS OTHERWISE				UNITS				DRAWING				PRODUCT PART NO.			
X	±0.30	X'	±5'	MM				王冠				00208-UCAF006-X			
X	±0.25	X'	±2'	比例				审核				产品名称			
XX	±0.30	XX'	±1'	SCALE				核准				TYPE C 16P母座立式SMT 防水 H=7.85			
XXX	±0.15	XXX'	±0.5'	DATE				2009/10/20				角法			
				DATE				A0				版本			
												A0			