


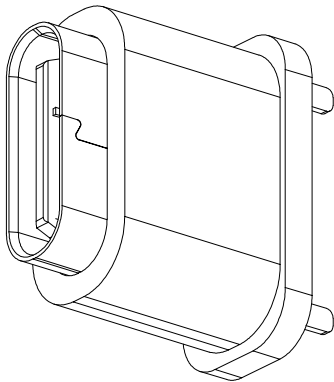


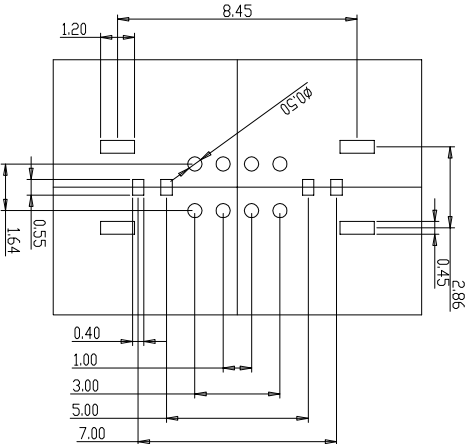


RoHS 客户图

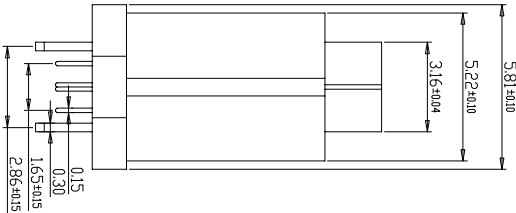

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 30mΩ MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
  - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
- MECHANICAL CHARACTERISTICS:
  - INSERTION FORCE :0.5-2.0kgf(REF.)
  - WITHDRAWAL FORCE :0.8-2.0kgf(REF.)
- LIFE TEST: 10,000 CYCLES.
- TO CONFORM TO THE KRODNN HAZARDOUS SUBSTANCE FREE SPEC.

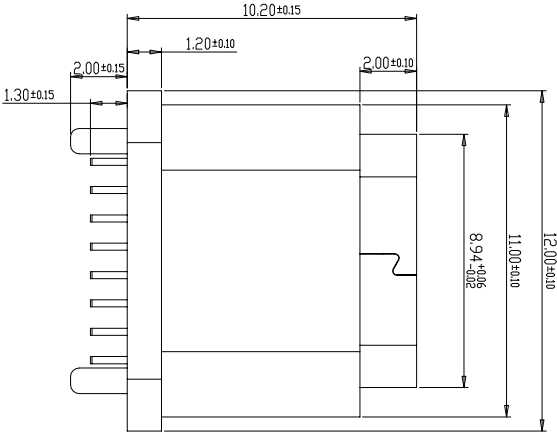

RECOMMENDED P.C.B. LAYOUT (T1.00mm)  
TOLERANCE UNSPECIFIED ±0.05mm

|        |             |       |             |       |       |       |       |       |     |
|--------|-------------|-------|-------------|-------|-------|-------|-------|-------|-----|
| L = MM |             |       |             |       |       |       |       |       |     |
| 8.80   | 9.30        | 10.00 | 10.50       | 12.40 | 13.10 | 13.70 | 15.00 | 17.50 |     |
| A1     | GND         | B12   | GND         | A4    | VBUS  | B9    | VBUS  | A5    | CC1 |
| A6     | JP1         | B7    | D1E         | A7    | D1I   | B6    | JP2   | A8    | SB1 |
| A9     | VBUS        | B4    | VBUS        | A12   | GND   | B1    | GND   |       |     |
| PIN    | SIGNAL NAME | PIN   | SIGNAL NAME |       |       |       |       |       |     |

|     |                 |                          |              |      |
|-----|-----------------|--------------------------|--------------|------|
| 6   | SHELL           | STAINLESS STEEL          | NI Plated    | IPCS |
| 5   | SHIELDING PLATE | STAINLESS STEEL          | ---          | IPCS |
| 4   | MD              | HIGH TEMPERATURE PLASTIC | BLACK        | IPCS |
| 3   | CONTACT         | COPPER ALLOY             | Au/Ni Plated | ISET |
| 2   | CONTACT         | COPPER ALLOY             | Au/Ni Plated | ISET |
| 1   | HOUSING         | HIGH TEMPERATURE PLASTIC | BLACK        | IPCS |
| NO. | DESCRIPTION     | MATERIAL                 | REMARKS      | QTY  |

| 产品图                        |       |       |       | 深圳市鑫风雷电子有限公司                             |            |         |                        |
|----------------------------|-------|-------|-------|------------------------------------------|------------|---------|------------------------|
| PRODUCT CHART DWG          |       |       |       | Shenzhen xinfenglei Electronics Co., Ltd |            |         |                        |
| 公差一览表                      |       |       |       | 单位                                       | MM         | 制图      | 王冠                     |
| TOLERANCE UNLESS OTHERWISE |       |       |       | UNITS                                    |            | DRAWING | Wangguun               |
| X                          | ±0.30 | X'    | ±5°   | 比例                                       | 1:1        | 审核      | 雷永健                    |
| XX                         | ±0.25 | XX'   | ±2°   | SCALE                                    |            | CHD     | Leiyoungjian           |
| .XXX                       | ±0.15 | .XXX' | ±0.5° | DATE                                     | 2009/10/20 | 核准      | 雷永健                    |
|                            |       |       |       |                                          |            | APPD    | Leiyoungjian           |
|                            |       |       |       |                                          |            |         | 联系方式                   |
|                            |       |       |       |                                          |            |         | Mailbox: sale@xfll.com |
|                            |       |       |       |                                          |            |         | www.xfll.com.com       |