

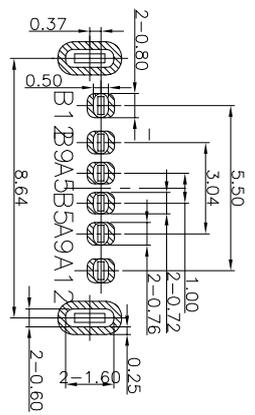
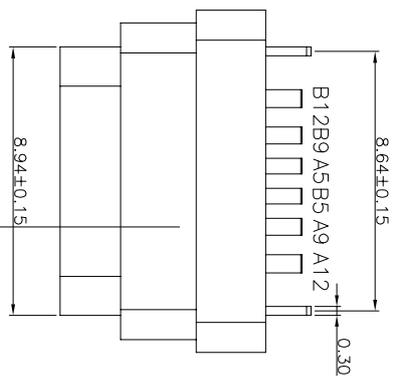
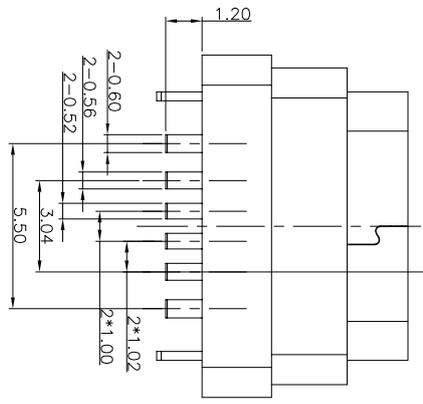
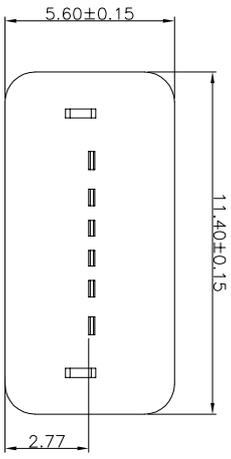
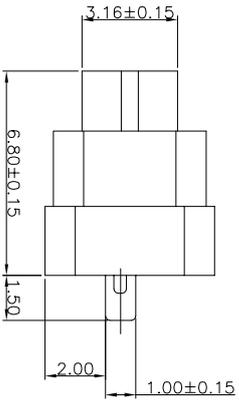


# RoHS 客户图


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

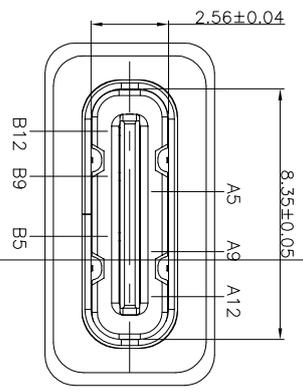

PCB板参考图



- TYPE C USB技术要求:
- 电气性能
    - 额定电流: 3A.
    - 额定电压: 5V.
    - 耐电压: 500 V(AC) for 1 min.
    - 接触阻抗: 40mΩ Max.
 可靠性和环境测试后阻抗变化不得超过10mΩ.
  - 绝缘阻抗: 100 MΩ Min.
  - 机械性能
    - 插入力: 5-20N, 拔出力: 6-20N.
    - 寿命测试: 1000cycles.
    - 推力: 50N min.
    - 剥离强度: 150N min.
    - 弯曲强度: 0.75Nm
  - 材料要求
    - 胶芯材料: LCP
    - 外壳材料: SS304
    - 端子材料: 26880
    - 盐雾要求: 24H
    - 工作温度: -20° C ~ 85° C
    - 防水性能: IPX7

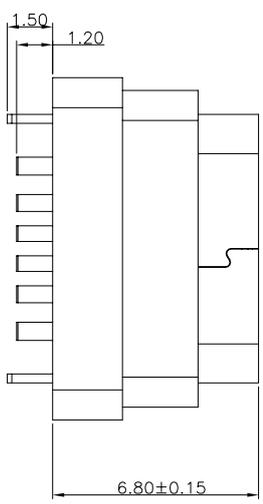

A1	B12	GND
A2	B11	
A3	B10	
A4	B9	VBUS
A5	B8	
A6	B7	
A7	B6	
A8	B5	C22
A9	B4	VBUS
A10	B3	
A11	B2	
A12	B1	

## 产品图

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	00101-UCAF006-A
X	±0.30	X'	±5'	审核 CHECK	雷永健	产品名称 PRODUCT NO.	TYPE C 6P 180度插板母座防水型=6.8
XX	±0.25	X''	±2'	日期 DATE	雷永健	角法 VIEW	
XXX	±0.30	XXX'	±1'	比例 SCALE		版本 VER	A0
	±0.15		±0.5'	核准 APPD			