
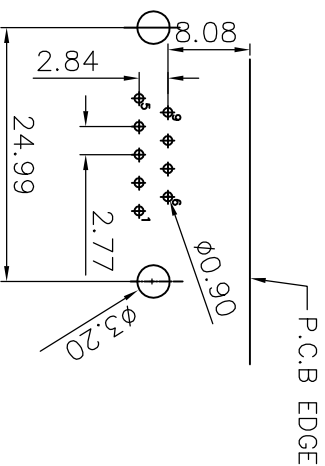
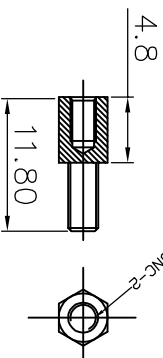

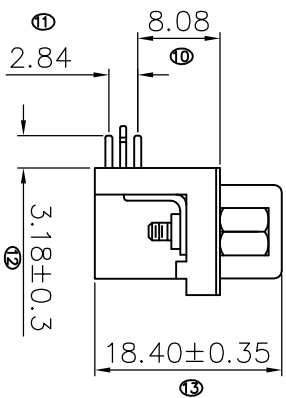
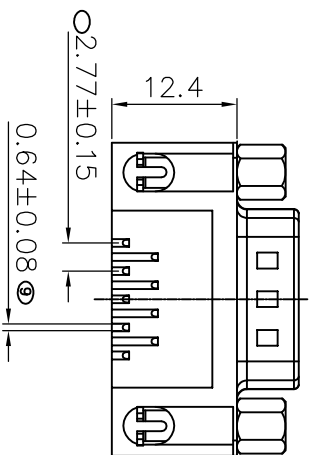


ROHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

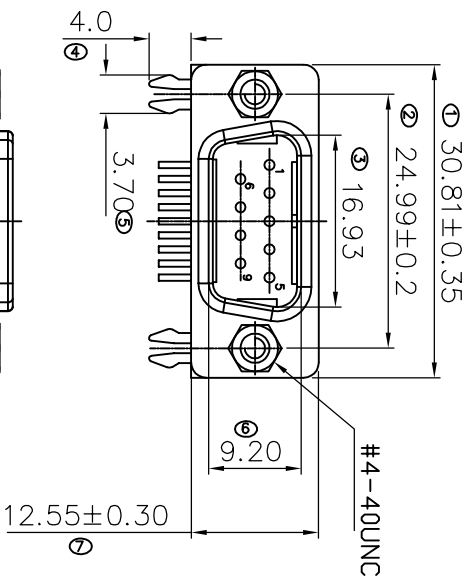

NOTE:
 1.MATERIAL:
 Rated voltage : 40 VAC
 Rated Current : 5AMP
 Contact Resistance : 30mΩ MAX.
 Insulation Resistance : 1000MΩ MIN.at 500V DC
 Withstanding voltage : 500V AC RMS for 1Minute
 Temperature range : -25Cid~ +85Cid
 2.Finished products should be noted that Harpoon deformation, distortion, high and low terminal PIN, distortion PIN, Rivet broken steel scratching dirt, sliding screw thread, of different lengths so bad

⑦	SCREW	2	STEEL/BRASS	NI
⑥	COVER	2	PBT+30%G/F	GREEN
⑤	FISH FORK	2	SPCC	TIN
④	RIVET	2	COPPER ALLOY	NI
③	SHELL	1	SPCC	NI
②	CONTACT	9	BRASS	??GOLD FLASH
①	INSULATOR	1	PBT+30%G/F	GREEN/BLACK

产品图 深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	26005-DRAM002-X
X	±0.30	X'	±5'	比例 SCALE	1:1	产品名称 PRODUCT NO.	DR 9P公90度铆锁螺丝
.XX	±0.25	.X'	±2'	日期 DATE	2009/10/20	角法 VIEW	DR 9P公90度铆锁螺丝
.XXX	±0.30	.XX'	±1'	核准 APPRO	雷永健	版本 VER	A0
	±0.15	.XXX'	±0.5'				