


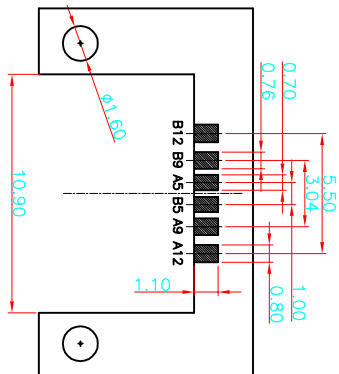
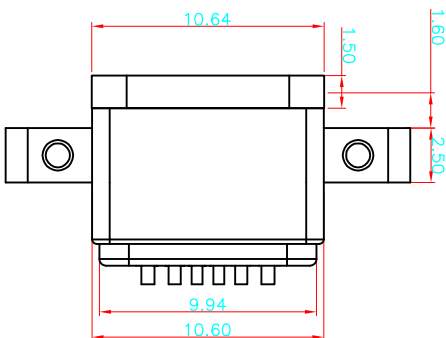
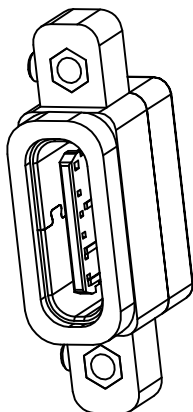
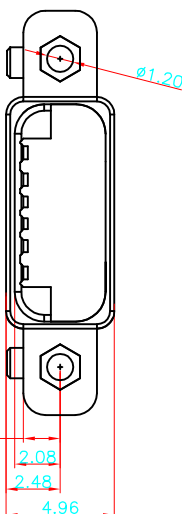




- NOTES:
- SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10,000 CYCLES
 - WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.

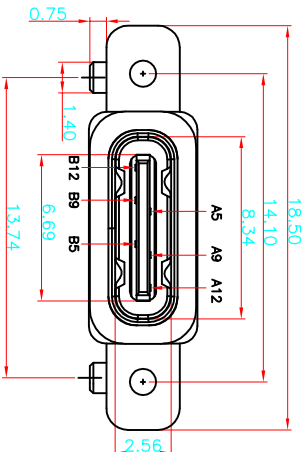

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

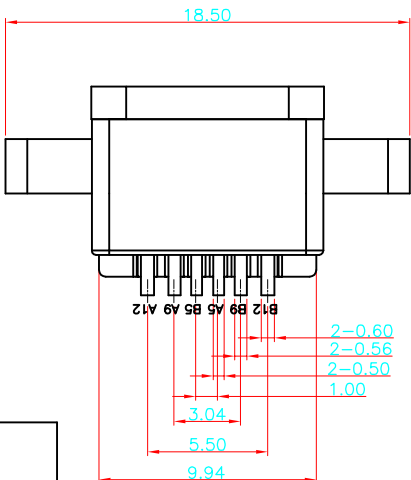

5	防水圈	硅胶	BLACK	1PCS
4	SHELL	STAINLESS STEEL	NI Plated	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	TIN/AU/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS				制图 DRAWING				产品料号 PRODUCT PART NO.			
X	±0.30	X'	±5°	X	±0.30	X'	±2°	X	±0.30	X'	±2°	X	±0.30	X'	±2°
XX	±0.25	XX'	±2°	XX	±0.30	XX'	±1°	XX	±0.30	XX'	±1°	XX	±0.30	XX'	±1°
XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°
比例 SCALE				日期 DATE				审核 CHECK				产品名称 PRODUCT NO.			
1:1				2009/10/20				雷永健				TYPE C 6P母座带螺母防水型			
角法 VIEW				版本 VER				A0							