



产品图					
PRODUCT CHART DWG					
公差一览表					
TOLERANCE UNLESS OTHERWISE					
X.	±0.30	X.	±5		
X	±0.25	X*	±2		
.XX	±0.15	.XX*	±1		
.XXX	±0.15	.XXX*	±0.5		
单位 UNITS		制图 DRAWING		产品料号 PRODUCT PART NO.	
比例 SCALE		审核 CHECKED		产品名称 PRODUCT NAME	
日期 DATE		核准 APPROVED		视图 VIEW	
2009/10/20		雷永健		Type c 16F插母座纯塑	
		雷永健		版本 VER	
				A0	

2.8工作温度: $-55^{\circ}\text{C}\sim+85^{\circ}\text{C}$

12345678910

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

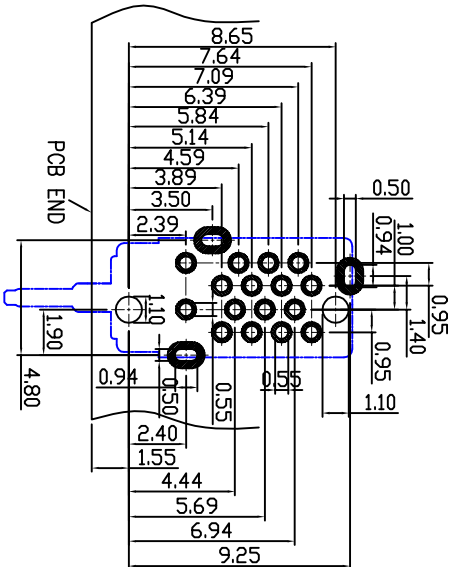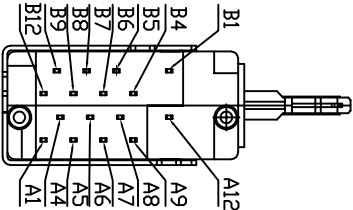

Pin	Signal Name	Description	Pin	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vias	Bus Power	B9	Vias	Bus Power
A5	CC1	Configuration Channel	B8	SRU2	Sideband lse (SRU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SRU1	Sideband lse (SRU)	B5	CC2	Configuration Channel
A9	Vias	Bus Power	B4	Vias	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

产品图

PRODUCT CHART DMC

深圳市鑫风雷电子有限公司

公差一览表	单位	MM	制图	王冠	产品料号	00302-UCAP011-X
TOLERANCE UNLESS OTHERWISE	UNITS		DRAWING		产品名称	Type c 16P 侧插 母座 纯塑
X ±0.30	X'	±5'	比例	1:1	审核	雷永健
.XX ±0.30	.XX'	±2'	SCALE		核准	雷永健
.XXX ±0.15	.XXX'	±0.5'	DATE	2009/10/20	APPRO	雷永健
			角法	⊕ ⊖	版本	VER
						A0