


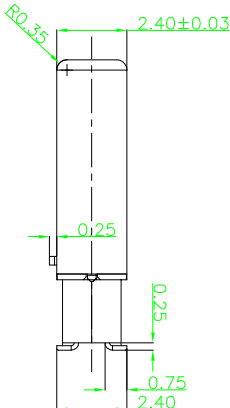




RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

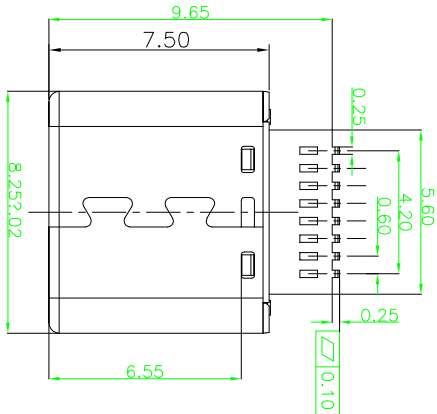

- SPECIFICATION:
- Mechanical Requirements:
 - Mating Force: 5~20N.
 - Unmating Force: 8~20N.
 - Durability: 10000 Cycles.
 - Electrical Characteristics:
 - Current Rating?3A
 - Voltage Rating?30V AC (rms)
 - Dielectric Strength : 100 VAC For 1 minute.
 - Insulation Resistance: 100MΩ/Unmating 10MΩ/Mating
 - Contact Resistance: 40 mΩ MAX.
 - Differential Impedance: 85±9Ω.
- 3.1: Operating Temp:-25°C TO +85°C
4. Material:
 - HOUSING&MOL.DINIGL:CP+30%G/F
 - CONTACT:CS210R-H
 - LATCH:Stainless steel,Plating Ni
 - SHELL:Stainless steel,Plating Ni
 - EMI SPRING: Stainless steel

产品图

PRODUCT CHART DWG

公差一览表

CONTACT	A12	A9	A8	A7	A6	A5	A4	A1
DEFINE	GND	VBUS	SBU1	D-	D+	CC	VBUS	GND
CONTACT	B1	B4	B5	B6	B7	B8	B9	B12
DEFINE	GND	VBUS	VCONN	/	/	SBU2	VBUS	GND

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
MM	王冠 Wangguan	23009-UCAM001-X
比例 SCALE	审核 CHKD	产品名称 PRODUCT NO.
1:1	雷永健 LeiYongjian	Type C 14p公头侧合立式SMT H=4.9, 65 侧胶头专用
日期 DATE	批准 APPD	联系方式 Mailbox/web
2009/10/20	雷永健 LeiYongjian	mailto:sale@xfll.com www.xfll.com.com