

# RoHS 客户图






目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			VBUS								
GND								VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A12&B12	A4&B4
SIGNAL NAME	GND	VBUS
PCB PAD NO.	C1	C2

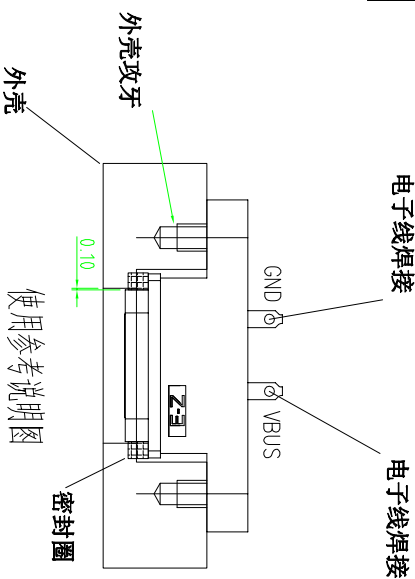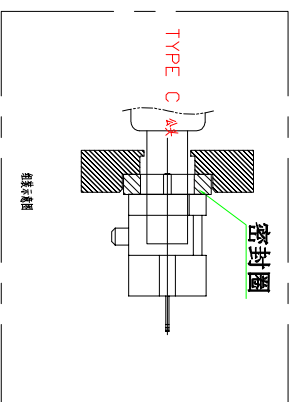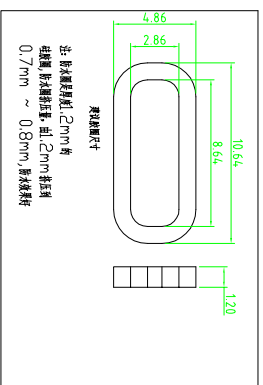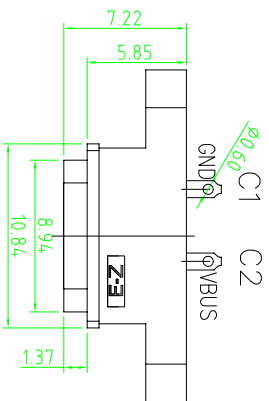

NOTES:

- SPECIFICATION:
- CURRENT RATING: 3.0A MAX
  - DIELECTRIC WITHSTAND VOLTAGE: 100VAC
  - TEMPERATURE RANGE: -30 °C ~ 85 °C
  - CONTACT RESISTANCE: 40 MILLIONHM MAX
  - INSULATION RESISTANCE: 100 MEGOHMS MIN.
  - INSERTION FORCE : 5N~20N
  - UNMATING FORCE: 8N~20N
  - DURABILITY:5000 CYCLES

5	Screw	1	C3604 Ni Plating	Ni40-120u"1
4	Shell	1	SUS301 Ni Plating T=0.25mm LCP(G.F30%)	Ni40-120u"1
3	M-02	1		
2	Contact	5	Phosphor bronze 52S10R-EH Au/Ni Plating T=0.20mm	Ni40-150u"1 AuCONTACT AREA:3u"1 OTHER AREA:6u"1
1	Housing	1	PA9T (G.F30%)	NDTTE

公差一览表

TOLERANCE UNLESS OTHERWISE	UNIT
X	MM
XX	MM
XXX	MM

产品图

Product CHART DWG

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronic Co., Ltd

制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.	00706-UCAR002-X
审核 CHECK	雷永健 Leiyongjian	产品名称 PRODUCT NO.	Type C 2p母座带焊丝带螺丝孔防水型
核准 APPR	雷永健 Leiyongjian	角法 VIEW	版本 VER
日期 DATE	2009/10/20		A0