
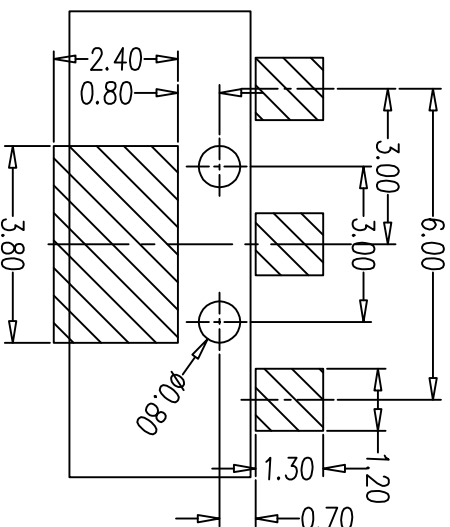
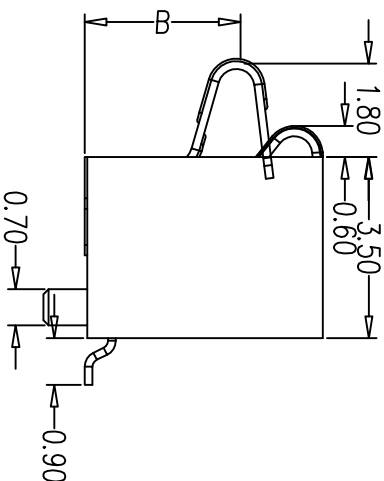
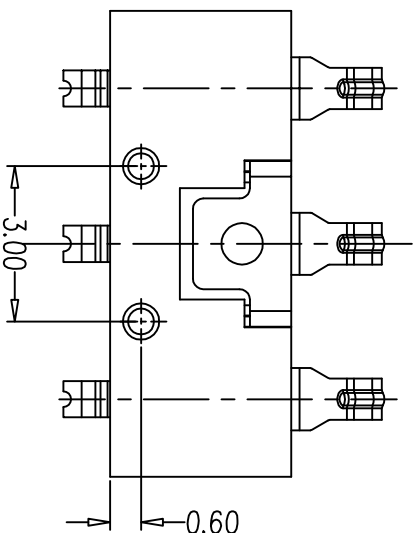


RoHS 客户图

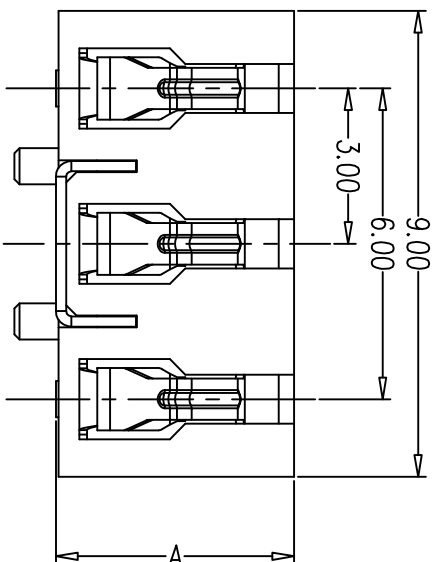

RECOMMENDED PCB LAYOUT
TOL: (±0.05)

目錄 MAPX	40	修改內容 MODIFICATION	NEW	日期 DATE	09-10-20
------------	----	----------------------	-----	------------	----------

- NOTES-
- 1.Electrical:
Contact resistance: 50m ohms max.
Dielectric withstanding voltage: 250V RMS.
Insulation resistance: 1000M ohms min.
 - 2.Mechanical:
MATE AND UNMATE FORCE:
MATE FORCE: 4.5kg MAX
UNMATE FORCE: 0.5kg MIN
Durability: 1500cycles MIN.
 - 3.Environment:
Operating Temperature: -55°to+105°.
 - 4.FINISH:
TERMINAL: GOLD Plated ALL Over NICKEL.
 - 5.COLOR:
HOUSING: BLACK.

XFLC01-03-08	7.20	5.60
XFLC01-03-07	6.80	5.20
XFLC01-03-06	6.20	4.60
XFLC01-03-05	6.00	4.40
XFLC01-03-03	5.40	3.80
XFLC01-03-02	5.00	3.40
XFLC01-03-01	4.60	3.00
Be filled	A	B

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	王冠 Wangguang	产品料号 PRODUCT PART NO.
X	±0.30	X	±5°	比例 SCALE	1:1	雷永健 Lei Yongjian	产品名称 PRODUCT NO.
.XX	±0.20	.XX	±1°	日期 DATE	2009/10/20	雷永健 Lei Yongjian	3P 电池座 3.0PH 有柱4.6-7.2H
.XXX	±0.15	.XXX	±0.5°	核准 APPROD		联系方式 Mailbox: sale1@xflicom.com www.xflicom.com	