

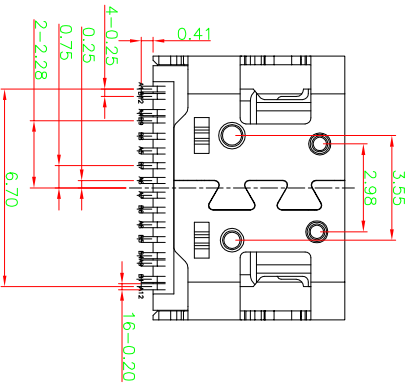
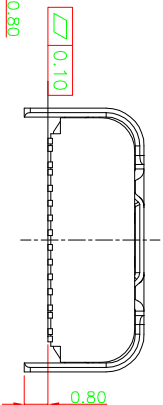

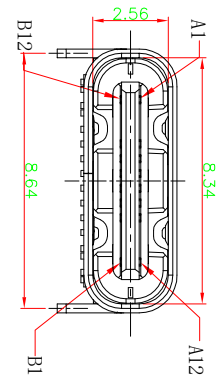



ROHS 客户图

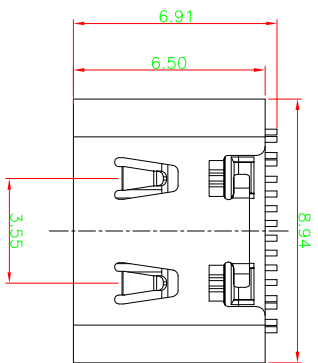

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

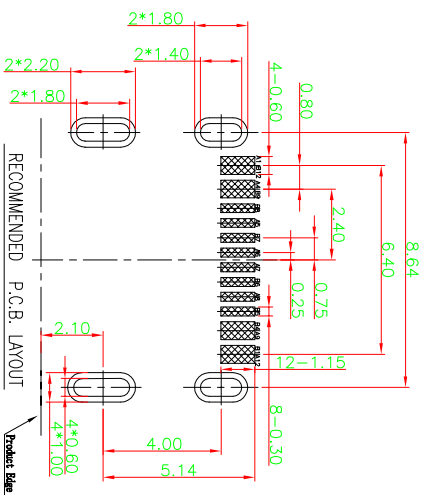

- NOTES:
SPECIFICATION:
- CURRENT RATING: 5.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10,000 CYCLES

产品图

深圳市鑫风雷电子有限公司

6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COOPER ALLOY	Au/NI Plated	1SET
2	CONTACT	COOPER ALLOY	Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

公差一览表

公差	UNITS	SCALE	DATE	制图	审核	核准	产品料号	产品名称	图法	版本
X	±0.30	X'	±5'	2009/10/20	王冠	雷永健	12011-UCAP011-X	TYPE C 16P插座板上单排SMT	1:1	A0
X	±0.25	X'	±2'					L=6.5特薄片		
XX	±0.30	XX'	±1'							
.XXX	±0.15	.XXX'	±0.5'							