
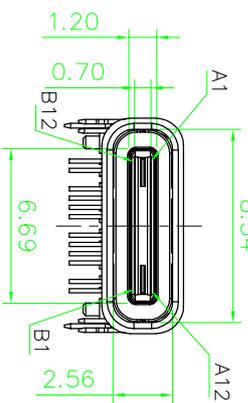

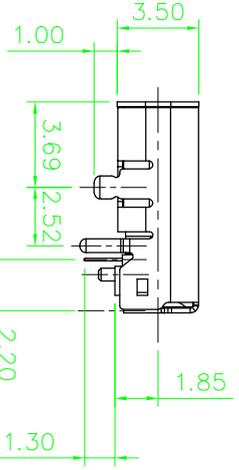

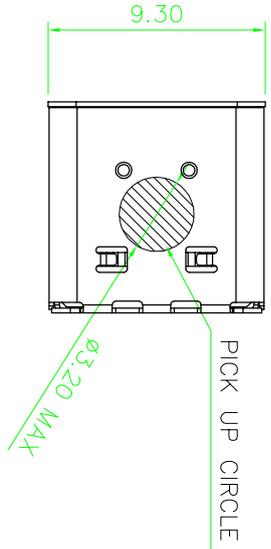


RoHS

客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------



Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SUB2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SUB1	Second	B5	CC2	Second
A9	VBUS	First	B4	VBUS	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL	GND	GND	SHELL	GND	GND

SPECIFICATIONS:
 Contact current Rating:
 5 Amperes for A1/B1/A12/B12&A4/B4/A9/B9.
 0.25 Amperes other contacts
 Withstanding Voltage: AC 100V(RMS)
 Insulation resistance: 100M(egohms) Minimum.
 Contact Resistance: 40mΩ Max
 Durability Test: 10000 Cycles
 Mating Force: 5-20 Newtons
 Umating Force: 8-20 Newtons.

深圳市鑫风雷电子有限公司

产品图 PRODUCT CHART DWG		单位 UNITS		MM		制图 DRAWING		王冠		产品料号 PRODUCT PART NO.		25007-UCAF003-X	
公差一览表 TOLERANCE UNLESS OTHERWISE		X		±0.30		X		±5°		审核 CHKD		雷永健	
X		±0.25		X		±2°		日期 DATE		2009/10/20		角法 ANGLE VIEW	
XX		±0.30		XX		±1°		版本 VER		A0			
XXX		±0.15		XXX		±0.5°							

