

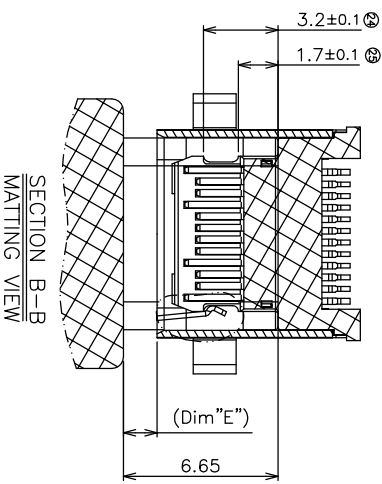

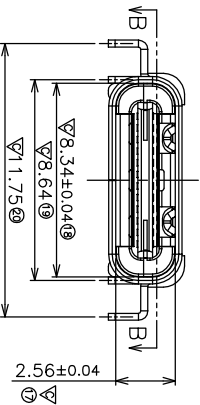

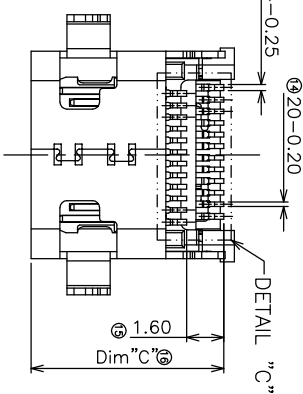
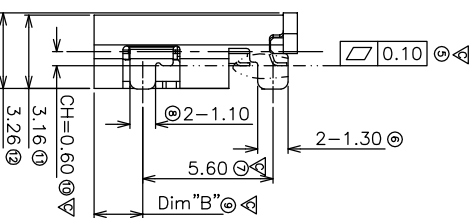


1 2 3 4 5 6 7 8 9 10

RoHS 客户图

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A3	ECN20160120003	(A3)	修改XYLY003-UCAF004-1的脚位尺寸	2016.01.20	王冠
B1	ECN20160811002	(B1)	整理图面，料号更新	2016.08.11	雷永健

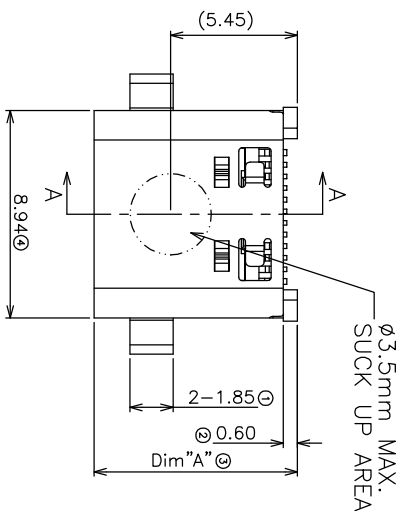

ELECTICAL(电气性能):
1. CONTACT RESISTANCE: 40 Milliohm MAX.
接触电阻: 40 Milliohm MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE: AC 100V/MINUTE
耐电压: AC 100V/MINUTE
3. INSULATION RESISTANCE: 100 Megohms MIN.
绝缘电阻: 100 Megohms MIN

MECHANICAL(机械性能):
1. MATING FORCE: 5-20N MAX.
插入力: 5-20N MAX.
2. UNMATING FORCE: 8-20N MIN.
拔出力: 8-20N MIN
3. DURABILITY: 10000 CYCLES
耐久: 10000次
Marked "S" should be FAI DIM,
标记 "S" 是FAI尺寸
Marked "V" should be major Control and first inspection DIM.
标记 "V" 是首件检验尺寸

产品图


深圳市鑫风雷电子有限公司

公差一览表			单位			制图			产品料号		
TOLERANCE UNLESS OTHERWISE			UNITS			DRAWING			PRODUCT PART NO.		
X	±0.30	X'	±5'						25003-UCAF004-X		
X	±0.25	X'	±2'						产品名称	TYPE	C母座沉板双排贴片CH-0.6
XX	±0.30	XX'	±1'						CHD	PRODUCT NO.	
.XXX	±0.15	.XXX'	±0.5'						日期	角法	版本
									2009/10/20	审核	VER
										雷永健	A0

RoHS

客戶圖

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A3	ECN20160120003		修改M1Y003-LICAP004-1的脚位/尺寸	2016.01.20	王冠
B1	ECN20160811002		整理图面, 料号更新	2016.08.11	雷永健

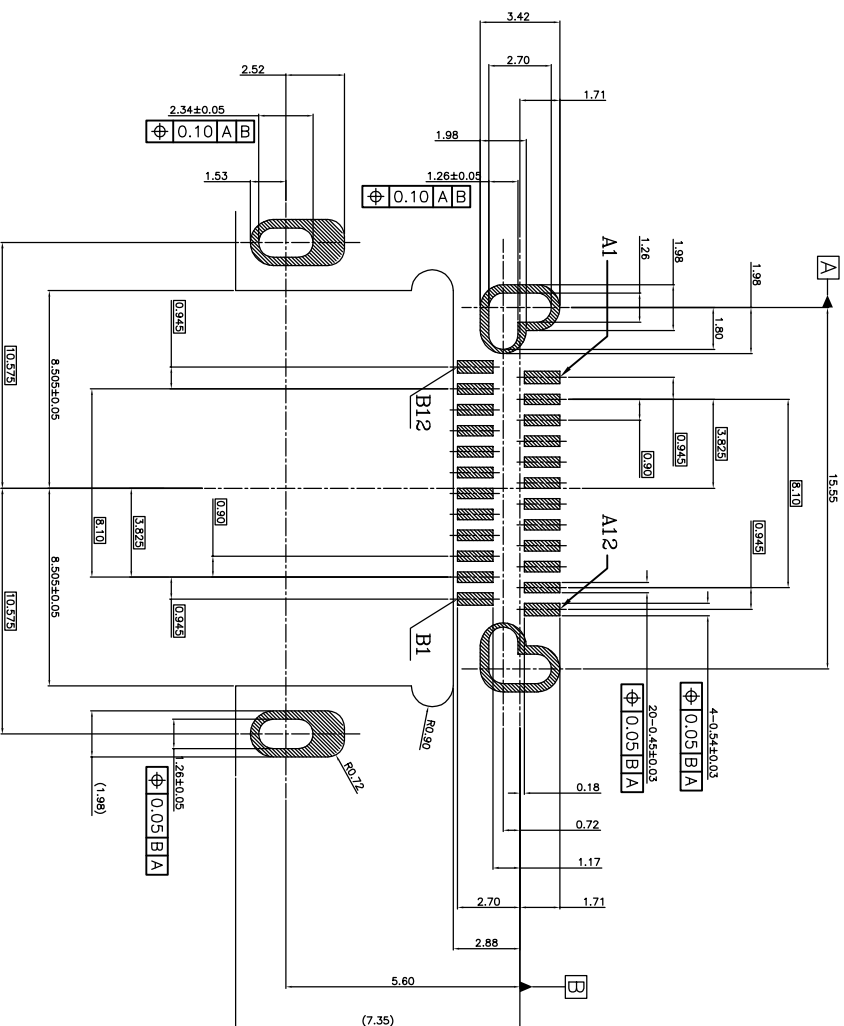

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

Pin	Signal Name	Description	Pin	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SRU1	Sideband Use (SRU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

圖書

深圳市鑫风雷电子有限公司

公差一览表									
TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	25003-UCAF004-X
X	±0.30	X	±5°	比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	TYPE C母座沉板双排贴片CH=0.6
.X	±0.25	.X°	±2°						
.XX	±0.30	.XX°	±1°						
.XXX	±0.15	.XXX°	±0.5°						
日期 DATE	2009/10/20	核准 APPD	雷永健	角度 VIEW		版本 VER	40		