

1

2

3

4

5

6

7





8

9





10

Rohs


客户图

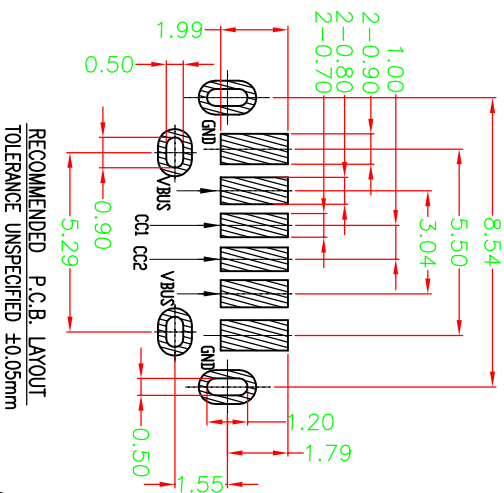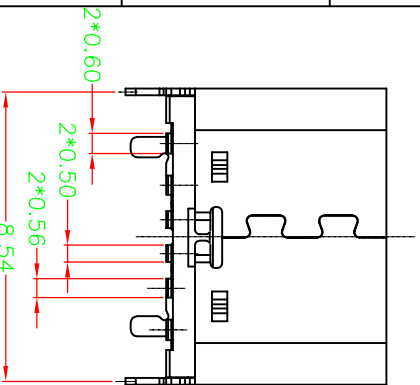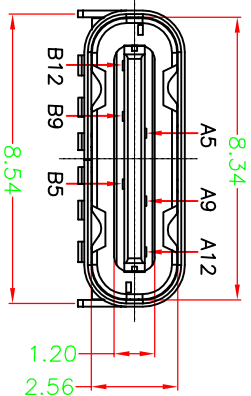

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

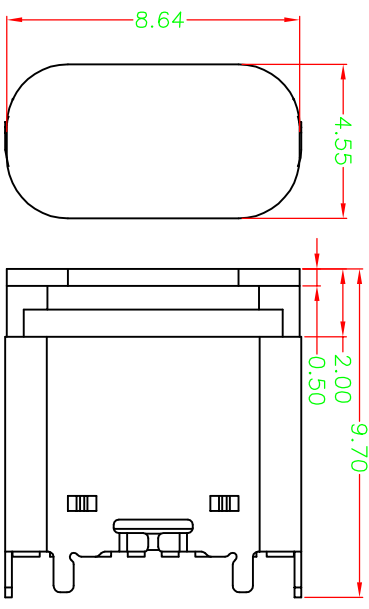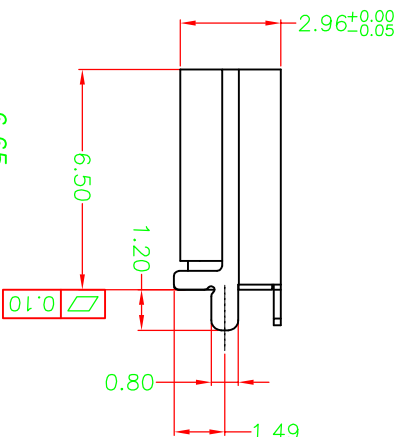

加塞子示意图

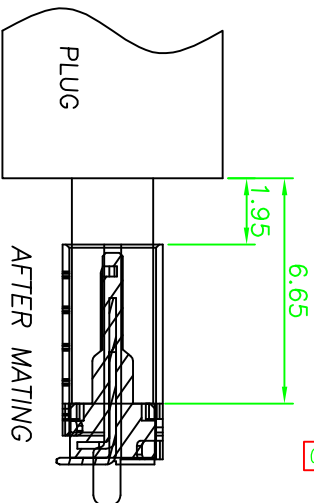

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	COVER	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NO Plated	1PCS
3	SHELL	STAINLESS STEEL	Ni:50u" Plated	1PCS
2	CONTACT	COPPER ALLOY	Au1u"/Ni:50u" Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表	单位	制图	审核	日期	比例	日期	批准	雷永健	产品料号	产品名称	角法	版本
TOLERANCE UNLESS OTHERWISE SPECIFIED	MM	DRAWING	王冠	2009/10/20	1:1	2009/10/20	Approved	雷永健	24001-UCAF035-C	TYPE C 6P母座180度SMT六脚 H=6.5	⊕	A0
.XX	±0.30	.X'	±5'	DATE	SCALE	DATE	APPRO					
.XX	±0.30	.X'	±2'									
.XXX	±0.15	.XXX'	±0.5'									

NOTES:

- SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10000 CYCLES

目錄

MAPX

A0

變更內容

MODIFICATION

NEW

日期

DATE

09-10-20