

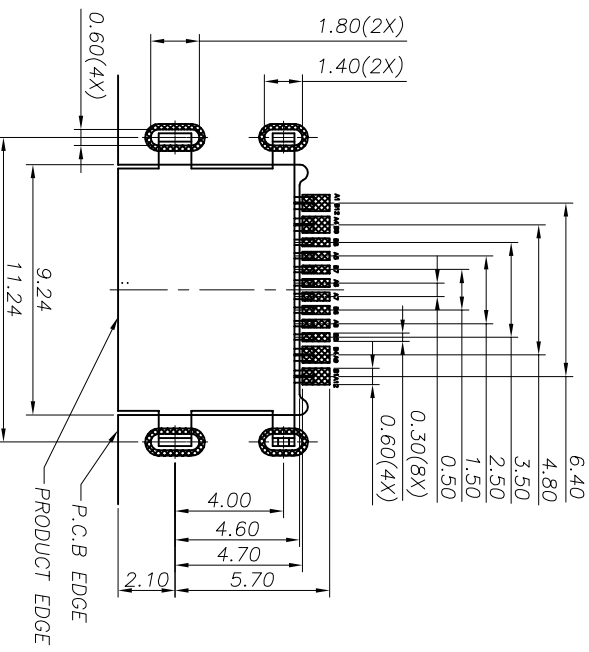
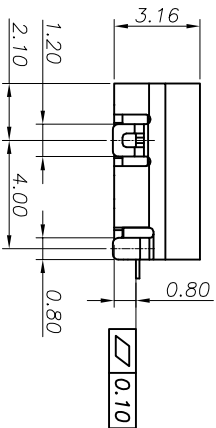
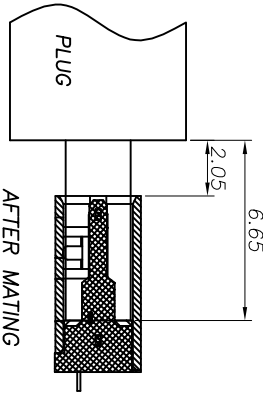
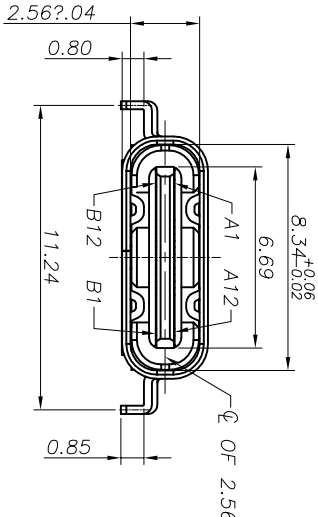
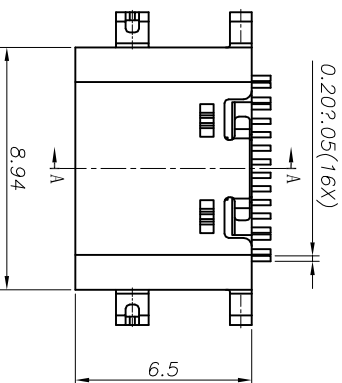


RoHS 客户图


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

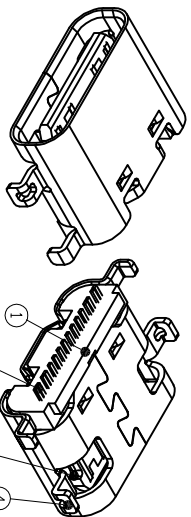

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05



SECTION A-A

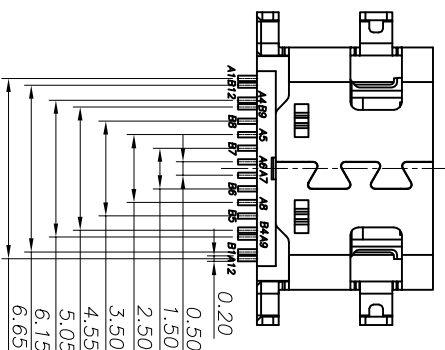

- NOTES:
- SPECIFICATION:
1. CURRENT RATING: 1.5A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES

A1	GROUND	B12	GROUND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DP2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GROUND	B1	GROUND
PIN	SIGNAL NAME	PIN	SIGNAL NAME




产品图 深圳市鑫风雷电子有限公司

公差一览表				单位			
TOLERANCE UNLESS OTHERWISE				UNITS			
X	±0.30	X'	±5°	比例	1:1	审核	王冠
XX	±0.25	X'	±2°	SCALE		核准	雷永健
XXX	±0.15	XXX'	±0.5°	DATE	2009/10/20	核准	雷永健
PRODUCT CHART DWG				产品料号			
				24001-UCAF005-X			
				产品名称			
				TYPE C母座单排16P沉板0.8			
				角法			
				版本			
				A0			


1 2 3 4 5 6 7 8 9 10

Rohs 客户图


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

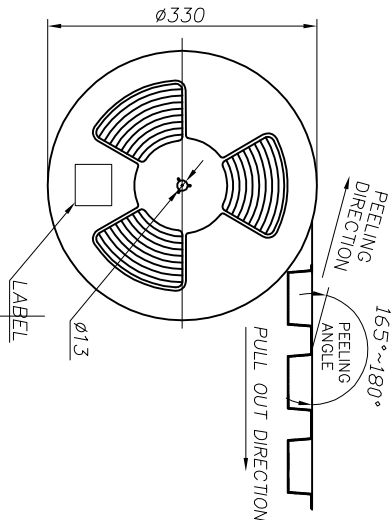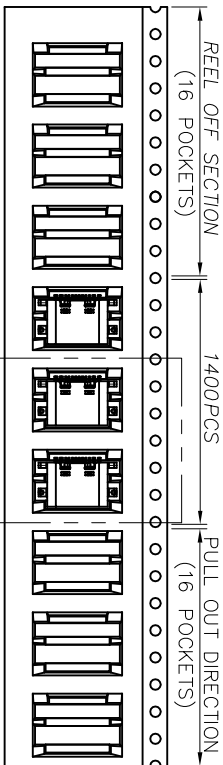

REEL OFF
DIRECTION

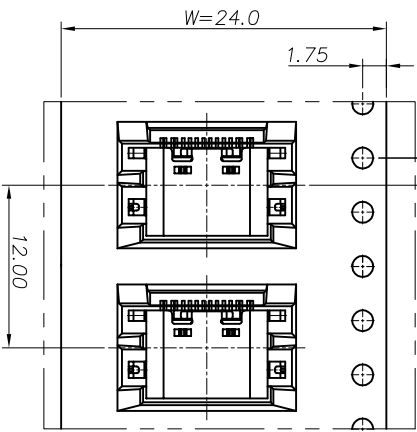

PULL OUT
DIRECTION

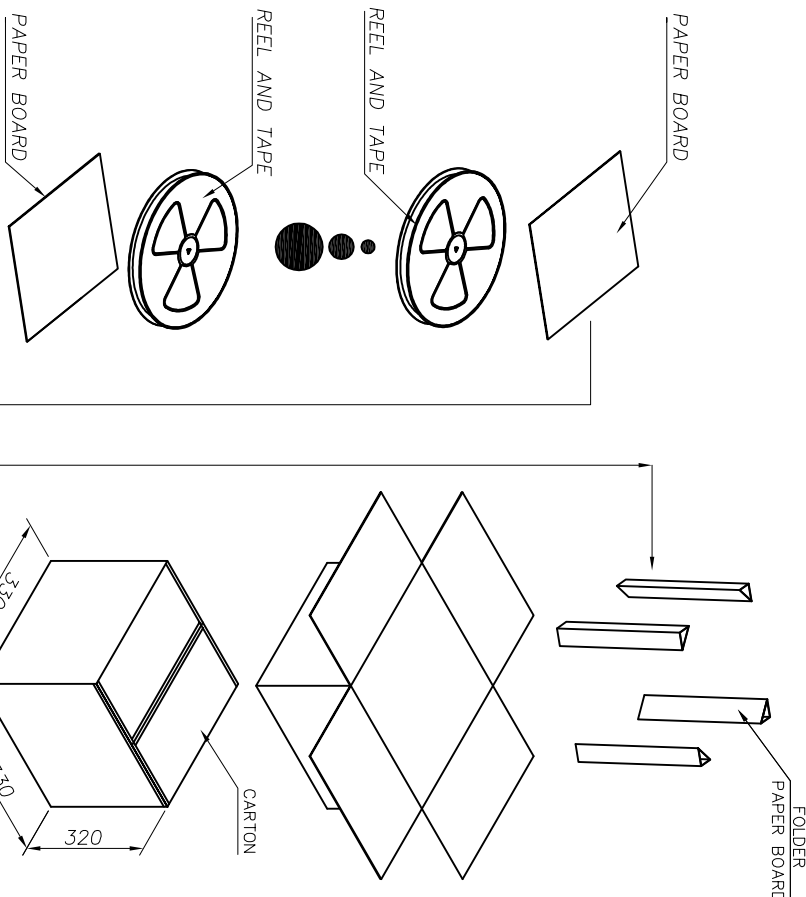

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	24001-UCAF005-X
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHRD	雷永健	产品名称 PRODUCT NO.	TYPE C母座单排16P沉板0.8
.XX	±0.25	.X'	±2°	日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER
.XXX	±0.30	.XX'	±1°						A0
.XXX	±0.15	.XXX'	±0.5°						

CONNECTOR (PCS)	REEL	CARTON
	1400	14000

由Autodesk 教育版产品制作