

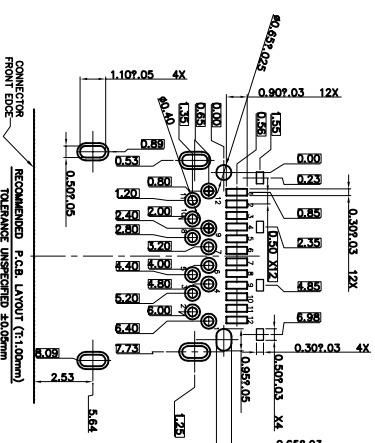
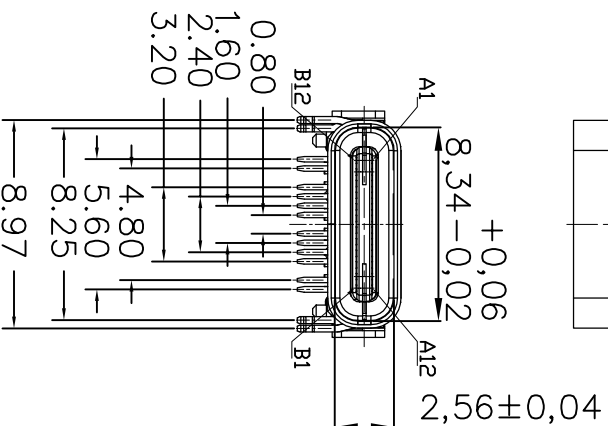
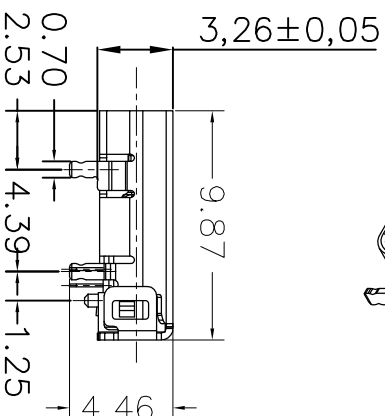


7	8	9	10
目録 MAPX	設定内容 MODIFICATION	日期 DATE	
A0	NEW	09-10-20	



A1	GND	B12	GND
A2	SSTXP1	B11	SSRX P1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SPU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRX P2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

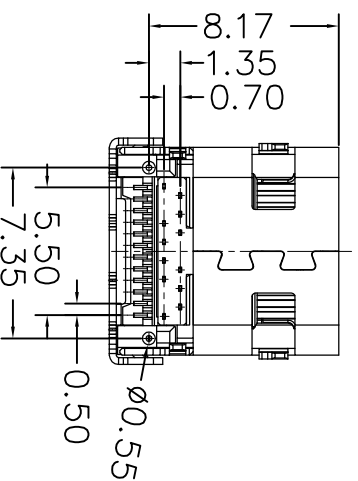

深圳市鑫风雷电子有限公司

公差一览表				単位 UNITS	MM	制図 DRAWING	王冠	製品料号 PRODUCT PART NO.
TOLERANCE UNLESS OTHERWISE				比例 SCALE	1:1	审核 CHECK	雷永健	产品名称 PRODUCT NO.
X.	±0.30	X.	±5°					TYPE C母座板上前部后贴24P U-9. 87无弹
.X	±0.25	.X	±2°					
.XX	±0.30	.XX	±1°					
.XXX	±0.15	.XXX	±0.5°					
DATE				2009/10/20		核准 APPRO	雷永健	角法 VIEW
								 
								19001-UCAF004-X 版本 VER AO

NOTES:
SPECIFICATION:

1. CURRENT RATING: 3A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -50 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES