

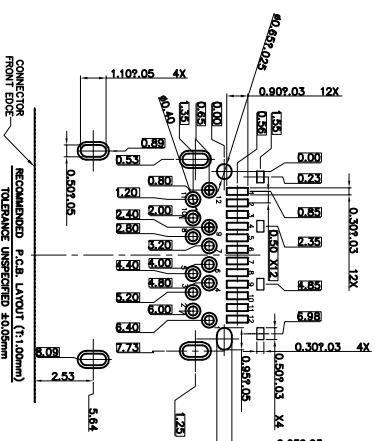

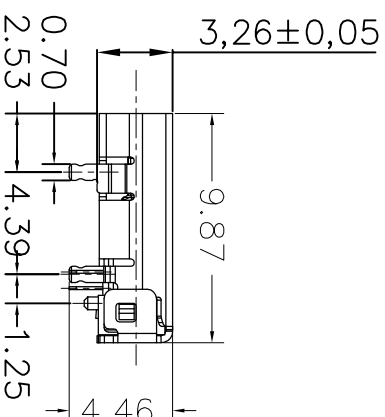
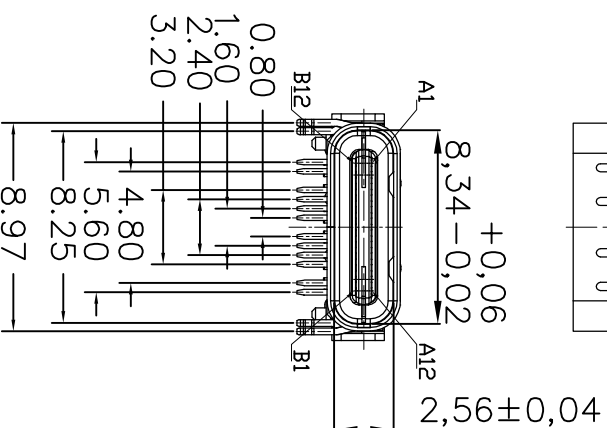


7	8	9	10
目錄 MAPY	設定內容 MODIFICATION	日期 DATE	
AO	NEW	09-10-20	



A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

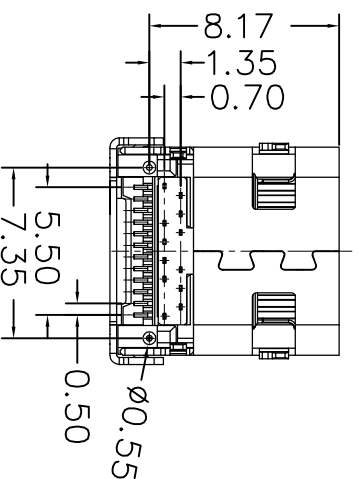

深圳市鑫风雷电子有限公司

公差—一览表				单位 UNITS	制图 DRAWING	产品料号 PRODUCT NO.
TOLERANCE UNLESS OTHERWISE				MM	王冠	19001-UCAF002-A
X.	±0.30	X.	±5°	比例 SCALE	审核 CHKD	产品名称 PRODUCT NO.
X.	±0.25	X.	±2°	1:1	雷永健	TYPE C母座板上附插孔间距24P L=9.87有缺口
XXX	±0.30	XX	±1°	日期 DATE	核准 APPR	版本 VER
XXX	±0.15	XX	±0.5°	2009/10/20	雷永健	AO
					画法 VIEW	

SPECIFICATION:

1. CURRENT RATING: 3A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX.
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES