



1 2 3 4 5 6 7 8 9 10





RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20




- NOTES:
- ELECTRONIC:
CONTACT RESISTANCE: 20mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.
 - MECHANICAL:
DURABILITY: 10000 CYCLE.
 - ENVIRONMENT CHARACTERISTICS:
OPERTING TEMPERATURE:-55°C TO +105°C
 - MATERIAL LIST:

3	SHELL	1	STEEL SK7	AU PLATED
2	CONTACT	19	COPPER ALLOY	AU/TIN PLATED
1	HOUSING	1	THERMOPLASTIC(LCP)	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK

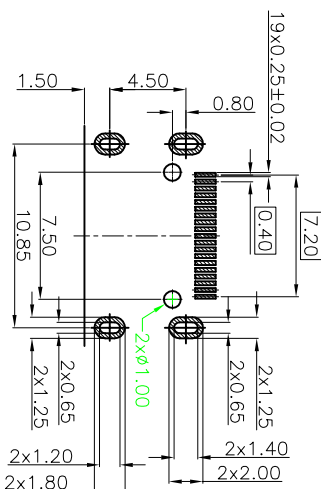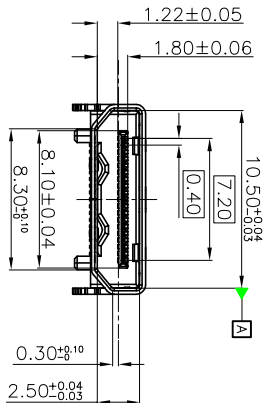

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES:±0.05

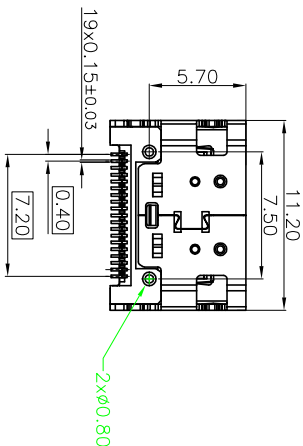

产品图




深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS				制图 DRAWING				产品料号 PRODUCT PART NO.			
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	HDMI C TYPE母座板上	H3.25	角法 VIEW	HD	版本 VER	A0	
.XX	±0.30	.XX'	±2°	日期 DATE	2009/10/20	批准 APPD	雷永健								
.XXX	±0.15	.XXX'	±1°												

12345678910

Rohs 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

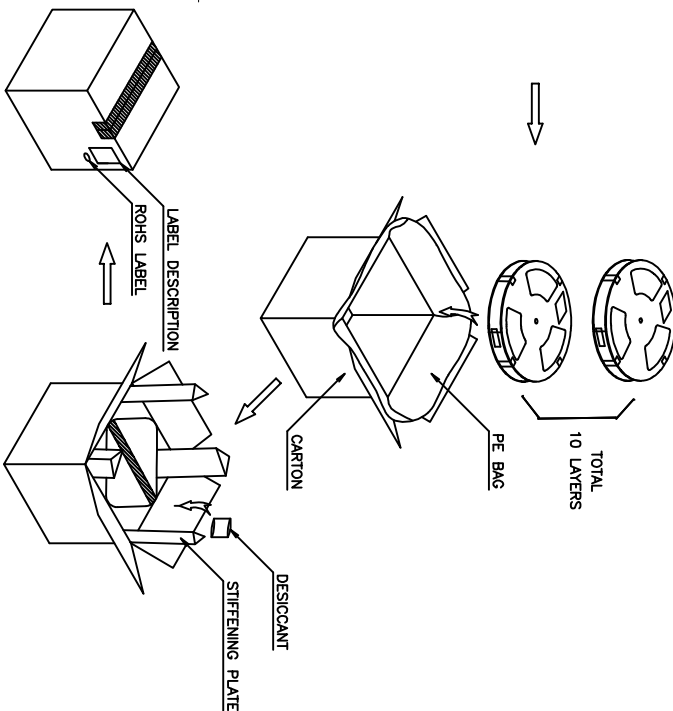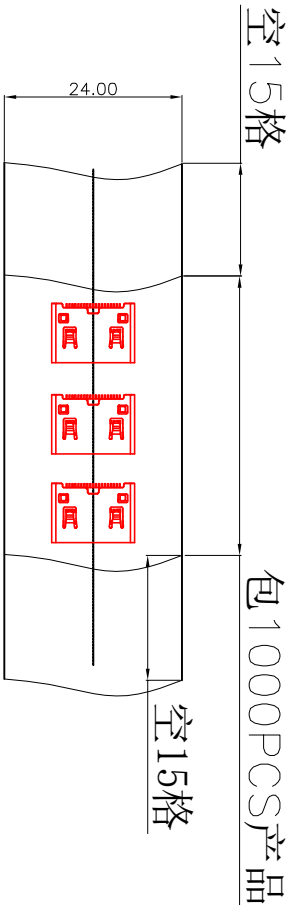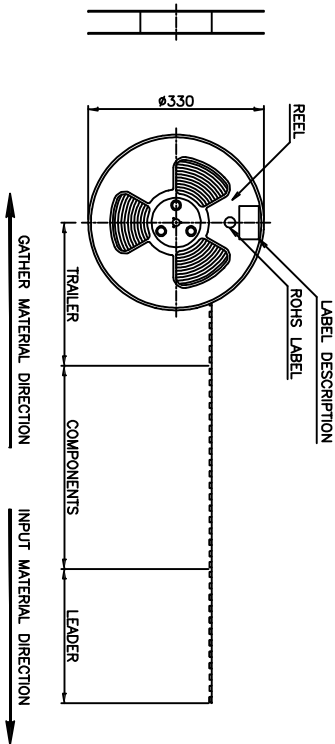

- Notes:
- 1.THE START AND END OF EACH REEL, BASED ON THE ACTUAL QUANTITY, RESERVED 5--15PCS SPACE;
 - 2.COVER TAPE AND CARRY TAPE PEEL, 10g~130g, PEEL DEG.:165°~175°;
 - PEEL SPEED: 250~300mm/min;
 - 3.QTY:1000PCS/REEL, 10REEL/CARTON, TOTAL 10000PCS/CARTON;

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.	
X	±0.30	X'	±5°	MM	王冠	00207-HDCF001-X	
X	±0.25	X'	±2°	比例 SCALE	审核 CHKD	产品名称 PRODUCT NO.	HDMI C TYPE母座上: H3.25
.XX	±0.30	.XX'	±1°	日期 DATE	核准 APPD	角法 VIEW	版本 VER
.XXX	±0.15	.XXX'	±0.5°	2009/10/20	雷永健		A0