


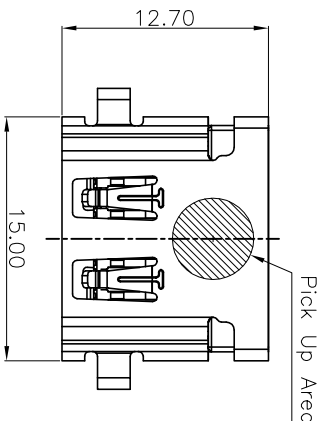
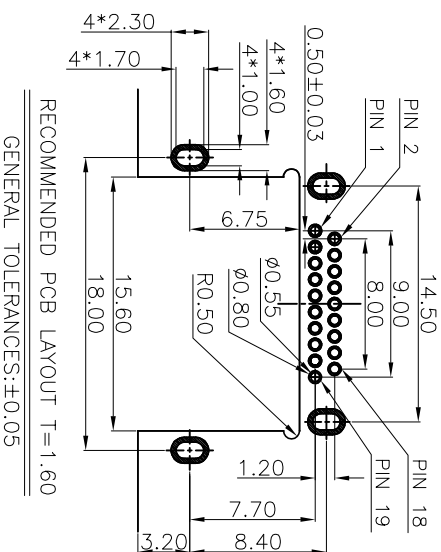


1 2 3 4 5 6 7 8 9 10


Rohs 客户图

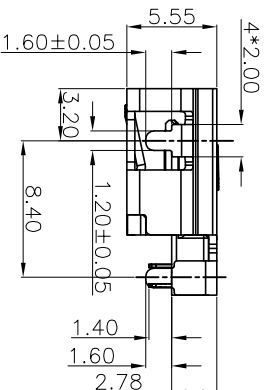

- NOTES:
- 1.ELECTRONIC:
CONTACT RESISTANCE: 20mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.
 - 2.MECHANICAL:
DURABILITY: 10000 CYCLE.
 - 3.ENVIRONMENT CHARACTERISTICS:
OPERTING TEMPERATURE:-55°C TO +105°C
 - 4.RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM

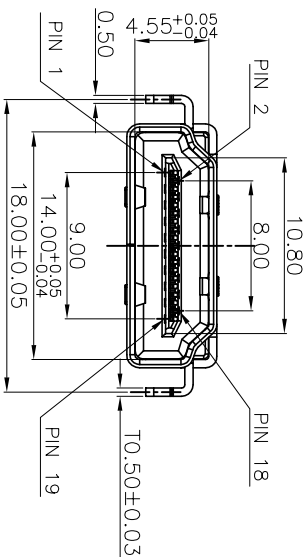

RECOMMENDED PCB LAYOUT T=1.60
GENERAL TOLERANCES:±0.05

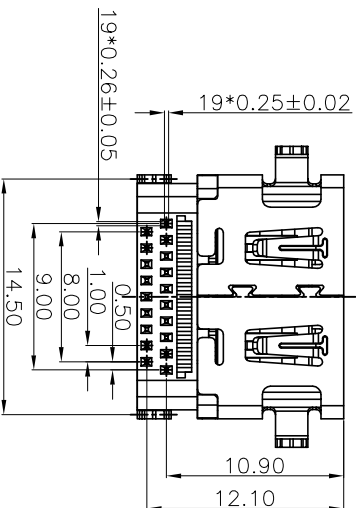

产品图




深圳市鑫风雷电子有限公司

公差一览表				单位				制图				产品料号			
TOLERANCE UNLESS OTHERWISE				UNITS				DRAWING				PRODUCT PART NO			
X	±0.30	X'	±5'	比例				审核				产品名称			
.XX	±0.25	.X'	±2'	SCALE				CHD				HDMI母座反向沉板 DIP H2.78			
.XXX	±0.30	.XX'	±1'	日期				批准				角法			
.XXX	±0.15	.XXX'	±0.5'	DATE				APPD				VIEW			
				2009/10/20				雷永健				版本			
												A0			

1 2 3 4 5 6 7 8 9 10

Rohs 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

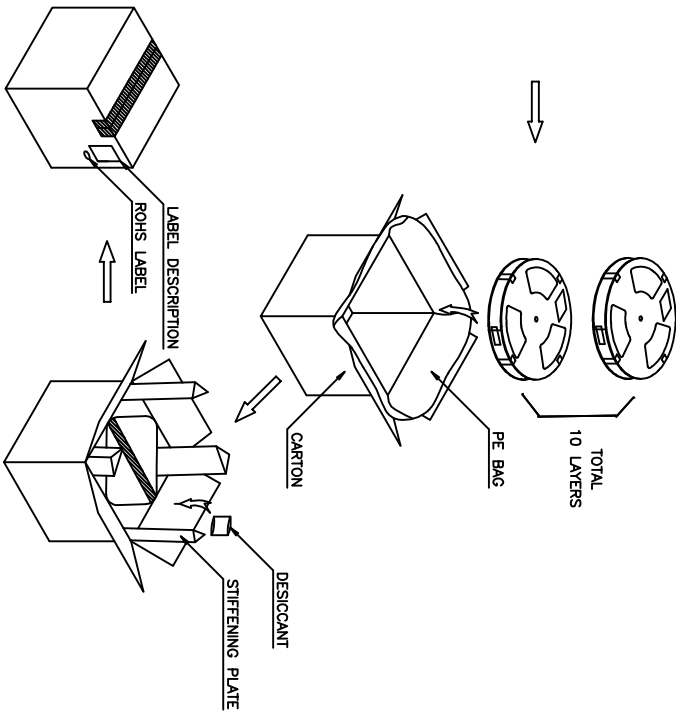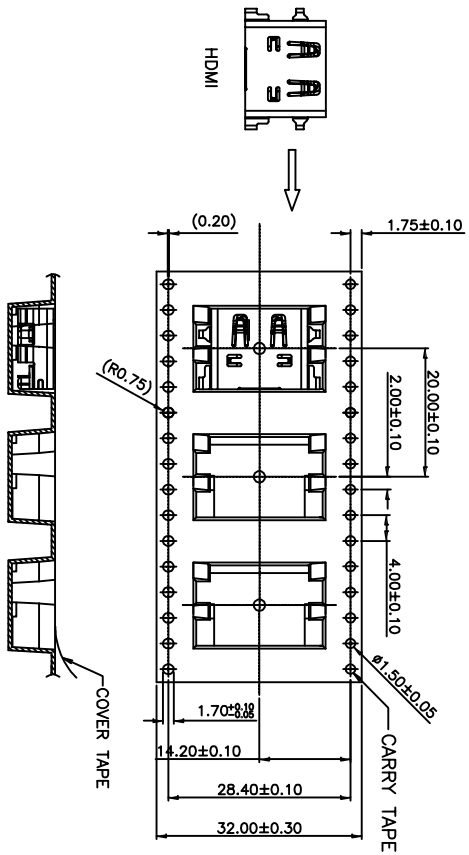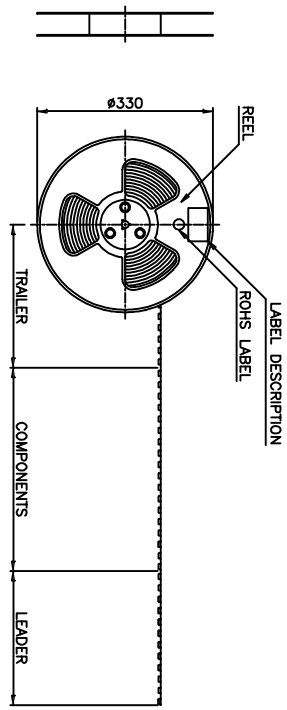

Notes:
1.THE START AND END OF EACH REEL, BASED ON THE ACTUAL QUANTITY,
RESERVED 5--15PCS SPACE;
2.COVER TAPE AND CARRY TAPE PEEL, 10g~130g, PEEL DEG.:165°~175°;
PEEL SPEED: 250~300mm/min;
3.QTY: 500PCS/REEL, 10REEL/CARTON, TOTAL 5000PCS/CARTON;

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.	
X	±0.30	X'	±5°	MM	王冠	00207-HDAF006-X	
.XX	±0.25	.X'	±2°	比例 SCALE	审核 CHKD	雷永健	HDMI插座反向沉板 DIP H2.78
.XXX	±0.15	.XXX'	±1°	日期 DATE	核准 APPD	雷永健	角法 VIEW
			±0.5°	2009/10/20			版本 VER
							A0