
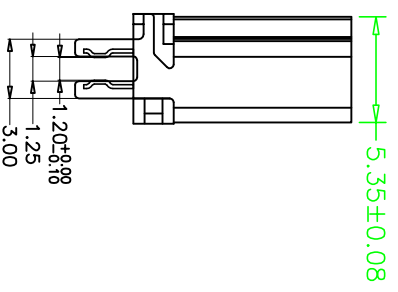
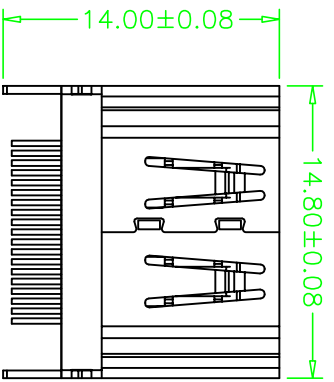


RoHS 客户图

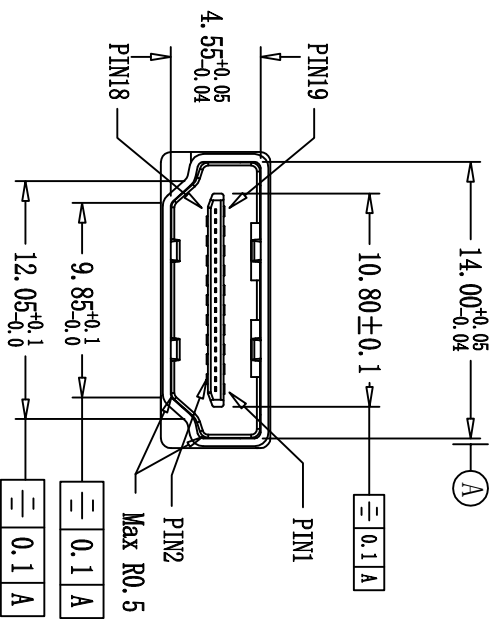

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

SPECIFICATION

- Electrical characteristics
 - Contact Current Rating: 0.5 A
 - Dielectric Withstanding Voltage: 300V AC
 - Insulation Resistance: a. Mate 100MΩ MIN at 500V/DC
b. Ummate 10MΩ MIN at 150V/DC
 - Contact Resistance: 30mΩ MAX
 - Temperature Range: -20° C to +85° C
- Mechanical
 - Mating Face: 44. 1N MAX
 - Ummatin Face: 9. 8N MIN; 39. 2N MAX
 - Durability: 5000 Cycles
- material:
 - HOUSING: THERMOPLASTICS HIGH TEMP LCP+GLASS
 - FIBER BLACK COLOR, UL94V-0
 - CONTACT: c2680 , T=0. 20MM
 - SHELL: spcc , T=0. 40MM
- PLATING:
 - CONTACT: 1~30u" GOLD/TIN PLATING ON CONTACT AREA
 - 100u" MIN, TIN PLATING ON SOLDERTAILS
 - 50u" MIN, NICKEL UNDERPLATING OVER ALL
 - SHELL: 80u" , NICKEL UNDERPLATING OVER ALL

产品图

深圳市鑫风雷电子有限公司

公差一览表		单位		比例		日期		制图		产品料号	
TOLERANCE UNLESS OTHERWISE		UNITS		SCALE		DATE		DRAWING		PRODUCT PART NO.	
X	±0.30	X'	±5'	1:1	王冠	00612-HDMI1A1-B					
X	±0.25	X'	±2'		雷永健						
XX	±0.30	XX'	±1'		雷永健						
.XXX	±0.15	XXX'	±0.5'								