
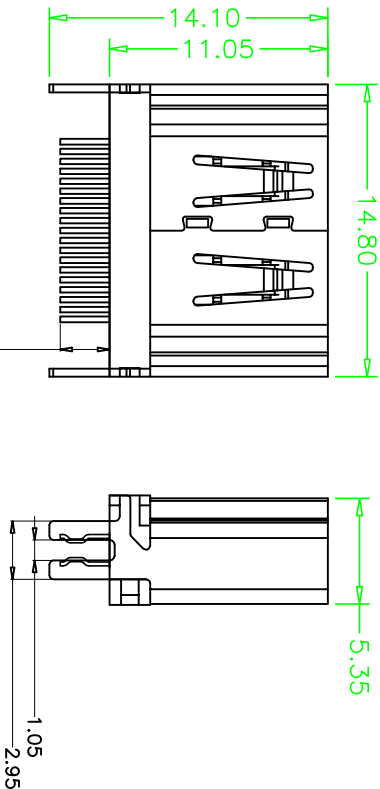


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

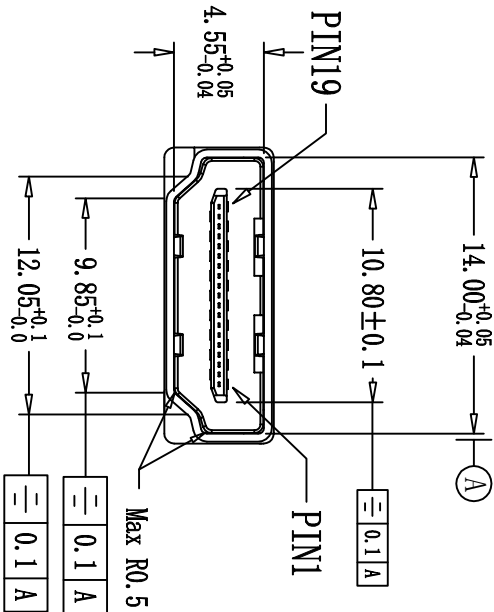

- SPECIFICATION**
- Electrical characteristics
Contact Current Rating:0.5 A
Dielectric Withstanding Voltage:300V AC
Insulation Resistance:a.Mate 100MΩ MIN at 500V/DC
b. Unmate 10MΩ MIN at 150V/DC
Contact Resistance:30mΩ MAX
Temperature Range:-20° C to +85° C
 - Mechanical
Mating Face:44.1N MAX
UmateIn Face:9.8N MIN:39.2N MAX
Durability:5000 Cycles
 - material:
HOUSING:THERMOPLASTICS HIGH TEMP LCP+GLASS
FIBER BLACK COLOR,UL94V-0
CONTACT:c26890 ,T=0.20MM
SHELL:spec ,T=0.40MM
 - PLATING:
CONTACT:1~30μ"GOLD/TIN PLATING ON CONTACT AREA
100μ"MIN,TIN PLATING ON SOLDERTAILS
50μ"MIN,NICKEL UNDERPLATING OVER ALL
SHELL:80μ",NICKEL UNDERPLATING OVER ALL

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHKD	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	比例 SCALE	1:1	雷永健	产品名称 HDMI A TYPE 19P母座夹板1.0
.X	±0.25	.X'	±2°	日期 DATE	2009/10/20	雷永健	角法 VIEW
.XX	±0.30	.XX'	±1°	核准 APPD			版本 VER
.XXX	±0.15	.XXX'	±0.5°				A0