

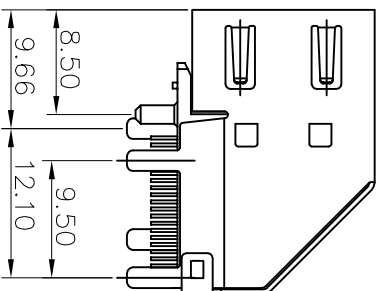
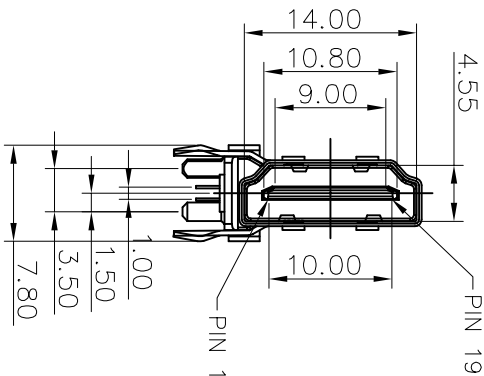
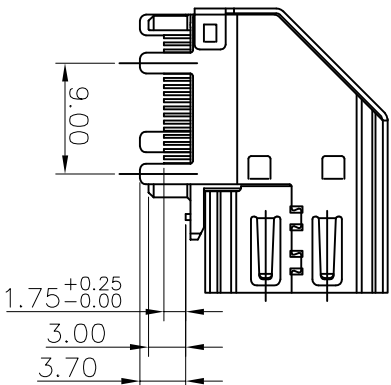
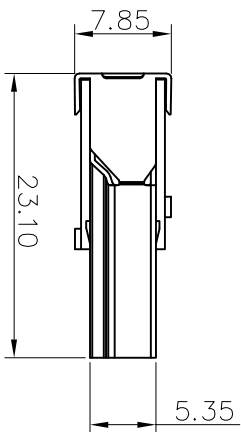


RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

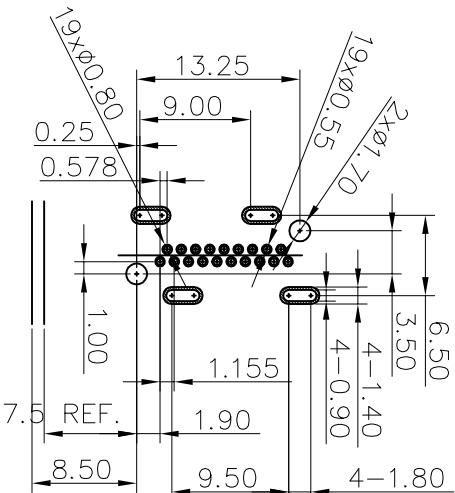

- NOTES:
- 1.MECHANICAL:
 - 1.1 INSERTION FORCE: 39.2N Max
 - 1.2 WITHDRAWAL FORCE: 9.8N Min
 - 2.ELECTRICAL:
 - 2.1 CONTACT RESISTANCE: 30mΩ Max
 - 2.2 INSULATION RESISTANCE: 100MΩ Min
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 - 3.ENVIRONMENTAL:
 - 3.1 TEMPERATURE RAGE: -20℃ ~ +85℃
 - 4.MATERIAL:
 - 4.1 HOUSING MATERIAL: LCP UL94V-0; Color: Blacke
 - 4.2 CONTACT MATERIAL: C2680R-EH
 - 4.3 SHELL MATERIAL: C2680



RECOMMENDED PCB LAYOUT (TOP VIEW)

TOLERANCE: ±0.05mm

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHKD	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	MM	王冠	雷永健	00614-HDAF001-X
X	±0.25	X'	±2°	SCALE	1:1	雷永健	HDMI 19P母座A型侧插无边针长1.75
.XX	±0.30	.XX'	±1°	DATE	2009/10/20	核准 APPRD	雷永健
.XXX	±0.15	.XXX'	±0.5°	角法 VIEW		版本 VER	A0