




7	8	9	10
<i>MARY</i>	<i>MODIFICATION</i>		<i>DATE</i>
<i>AO</i>	<i>NEW</i>		<i>09-10-20</i>



1. Insertion force: 4.1N MAX.
2. Withdrawal force: 9.8~39.2N.
3. Durability: 10000 Cycles.
4. Current rating: 0.5A
5. Voltage rating: 40V AC MAX.
6. Dielectric strength:
 - 500V AC MIN. (UNMATED)
 - 300V AC MIN. (MATED)
7. Contact resistance: 30mΩ MAX.
8. Insulation resistance:
 - 100MΩ DC MIN. (UNMATED)
 - 10MΩ DC MIN. (MATED)
9. Temperature: -40℃ TO +85℃
10. All the material must accord with the RoHS.
11. The important dimensions with "▲"

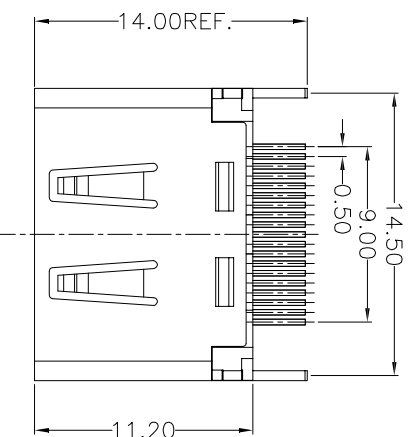


BOTTOM VIEW



Detail B
Scale 2:1

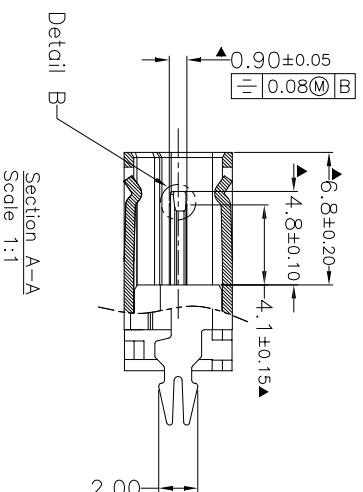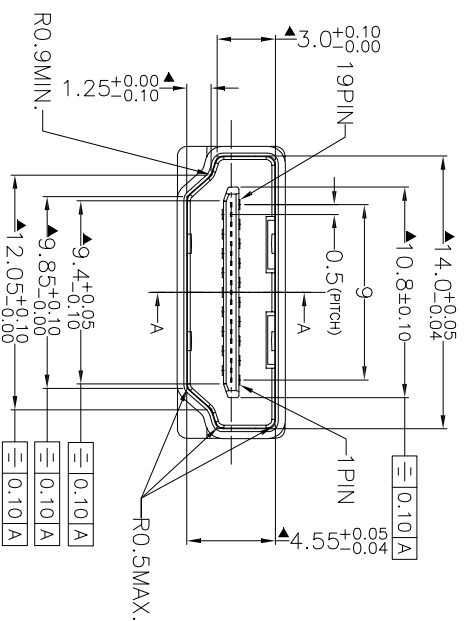

Section A-A
Scale 1:1

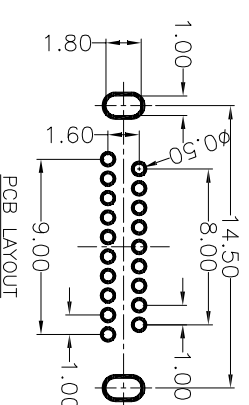

PCB LAYOUT

03	Terminal	C5191	19	Gold plated within connect area ,Tin plated within solder area
02	Housing	LCP	1	LCP+30%GF UL94-V0, Color is black
01	Shell	SPCC/C2680	1	Plating nickle or gold overall
零件 NO	零件 PART NAME	材料 MATERIAL	数量 QTY	备注说明 REMARKS

圖書

深圳市鑫风雷电子有限公司

公差—一览表				单位 UNITS	制图 DRAWING	王冠	产品料号 PRODUCT NO.
TOLERANCE UNLESS OTHERWISE				MM			01006-HDMI A2-X
X.	±0.30	X.	±.5°	比例 SCALE	审核 CHKD	雷永健	产品名称 PRODUCT NO.
X.	±0.25	X.	±.2°	1:1			HDMI A TYPE母座180度鱼叉脚H=11.2
.XX	±0.30	.XX	±.1°	日期 DATE	核准 APPD	雷永健	角法 ANGLE
.XXX	±0.15	.XXX	±0.5°	2009/10/20			
							版本 VER
							AO